



**Fig. 1A**  
1/30

**Fig. 1B**

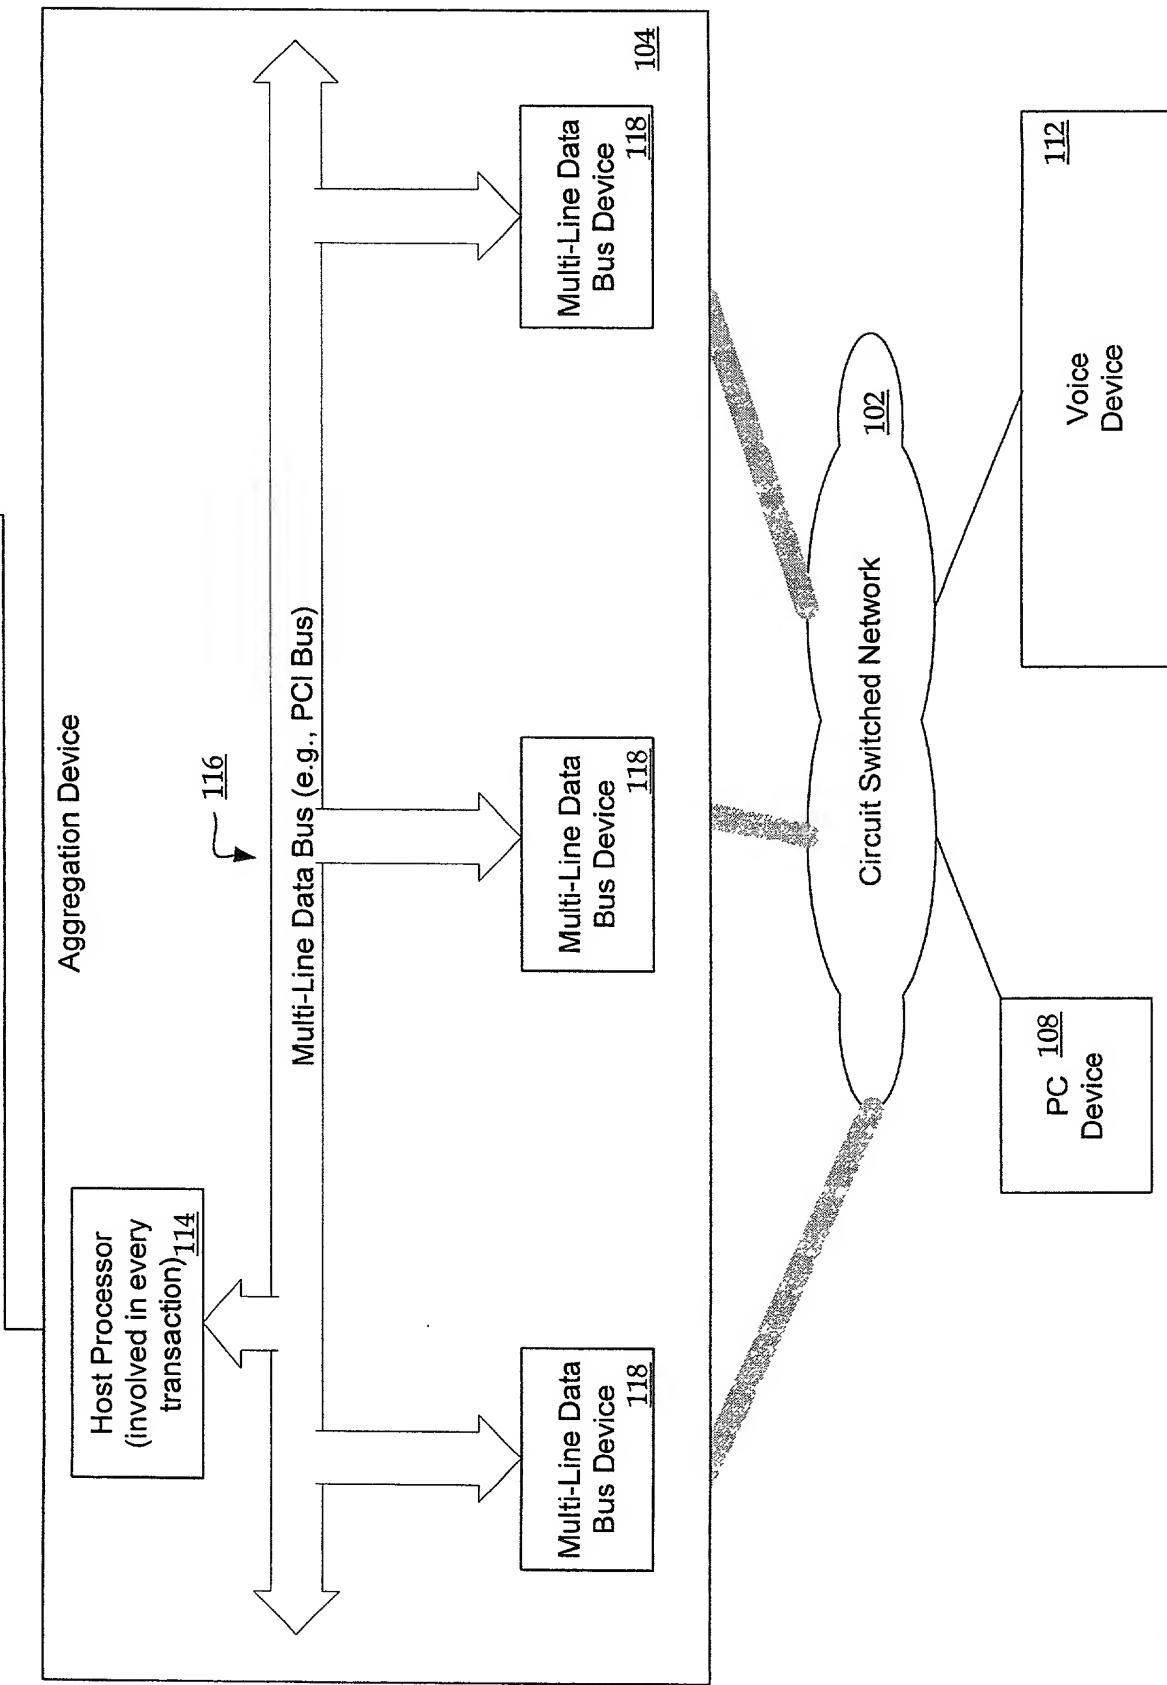

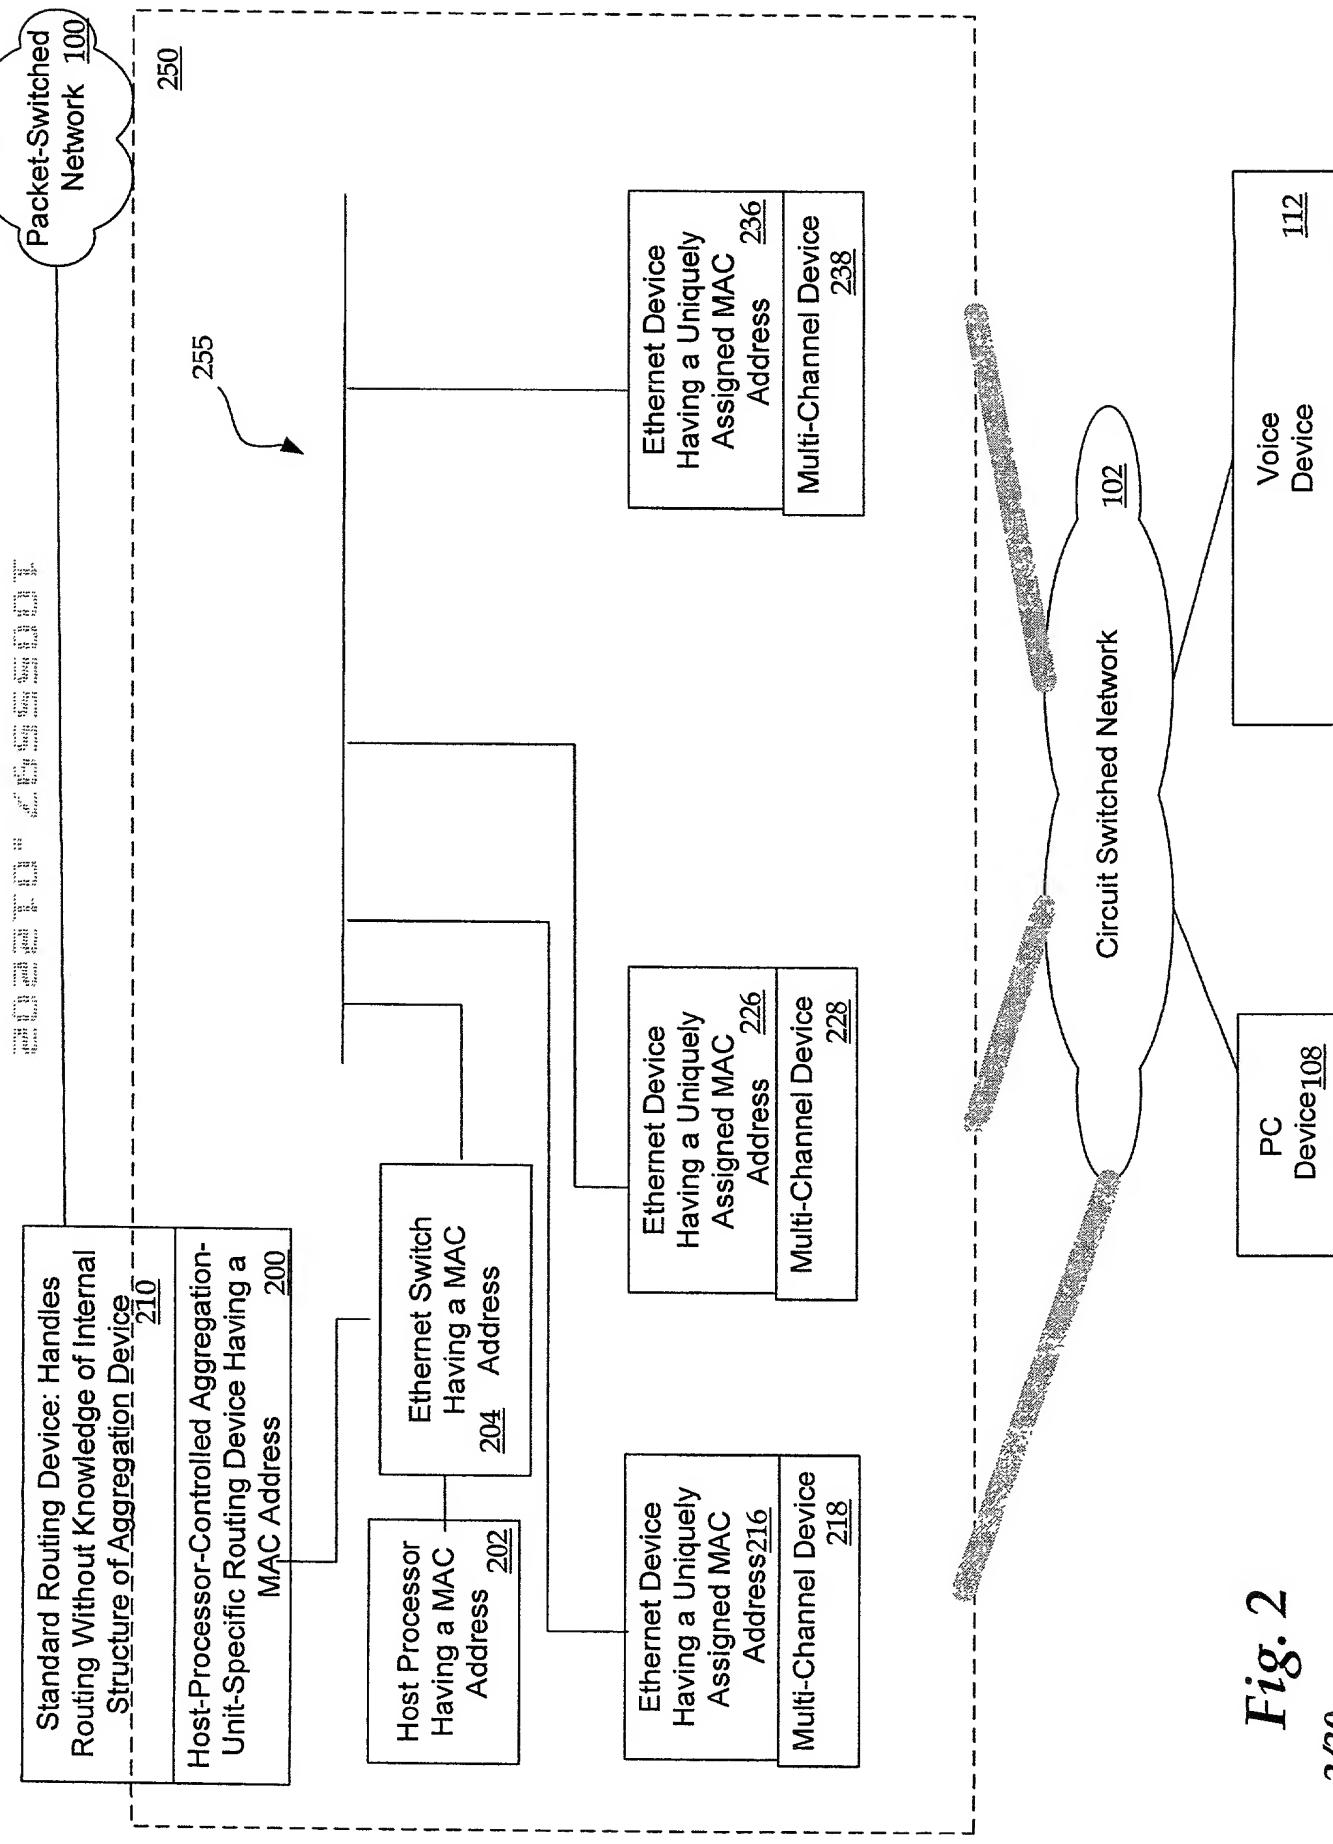

**Fig. 2**  
3/30





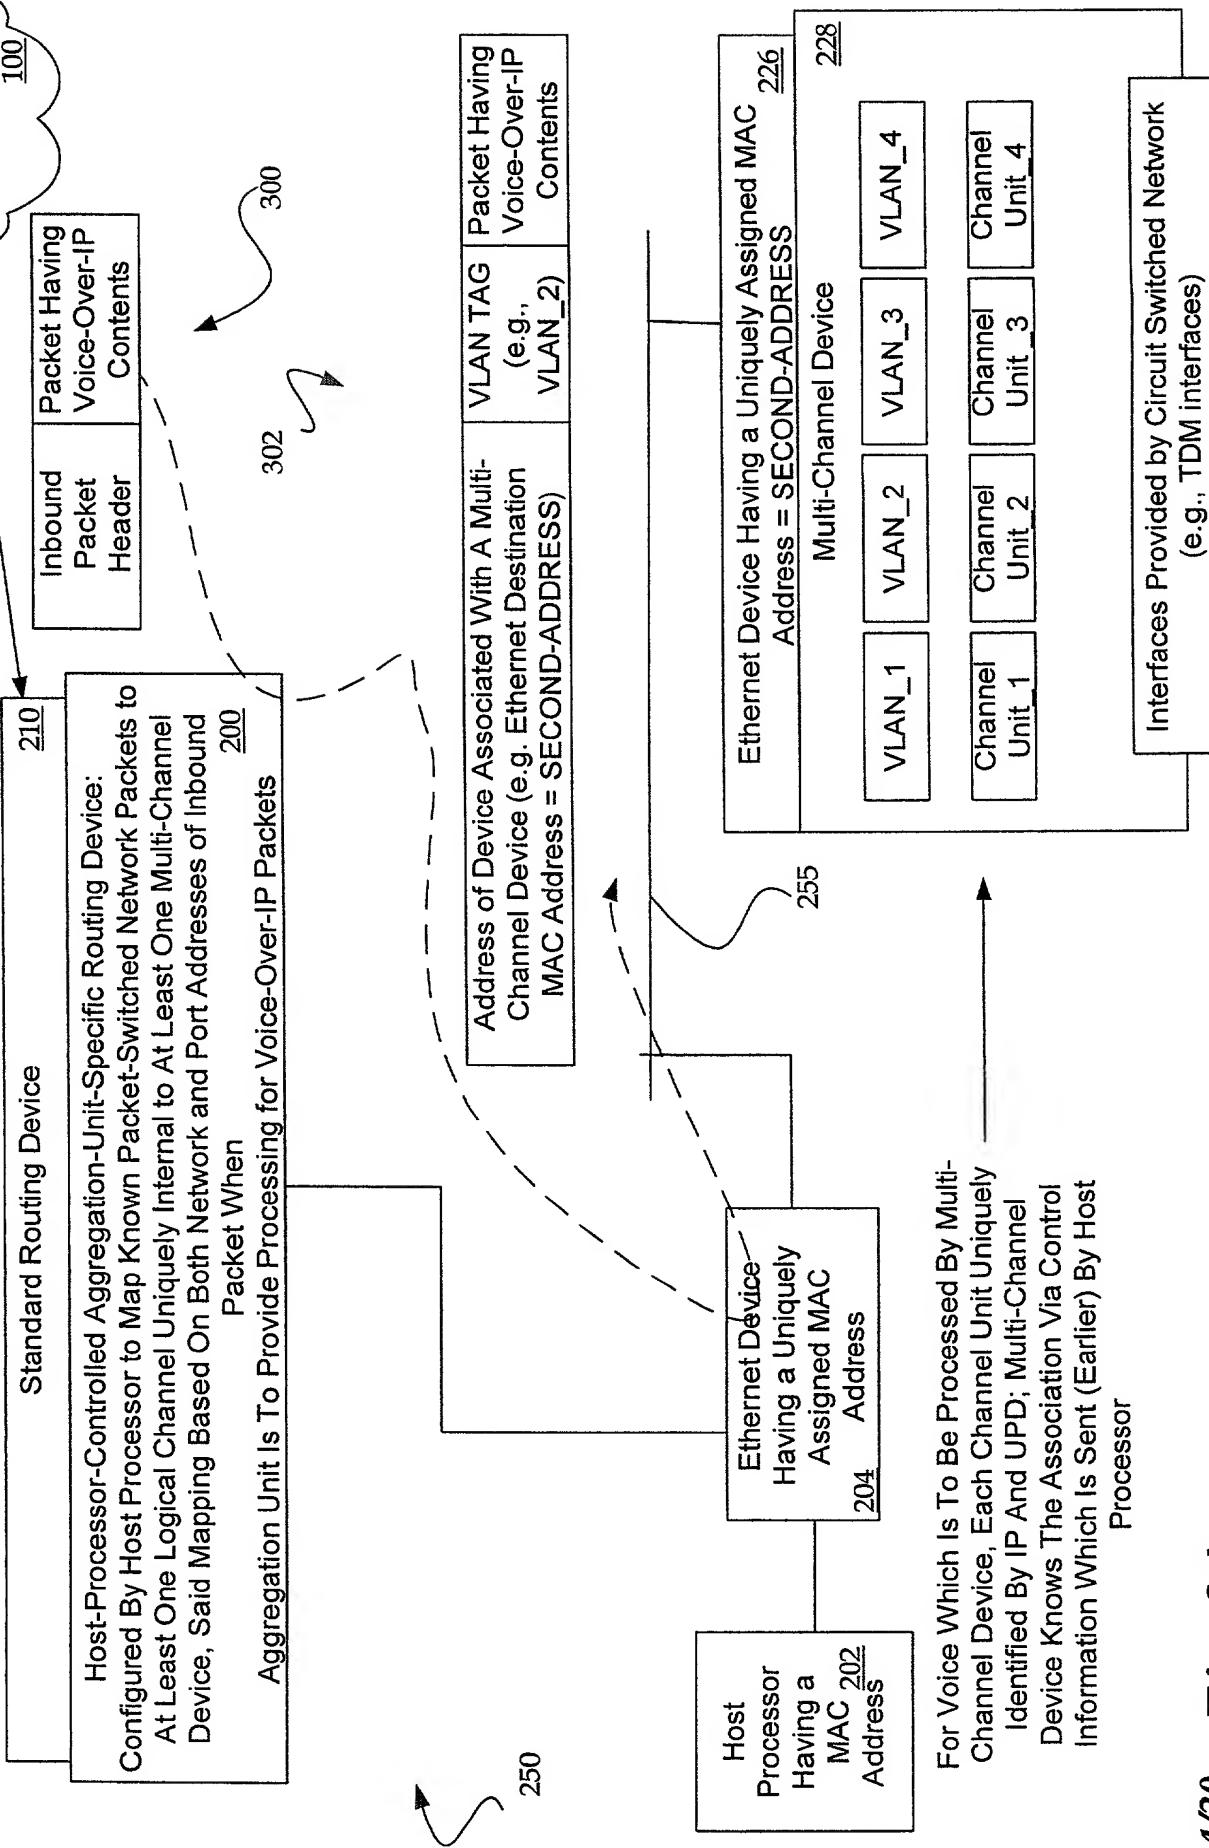


Fig. 3A  
4/30


**Fig. 3B**


**Fig. 3C**

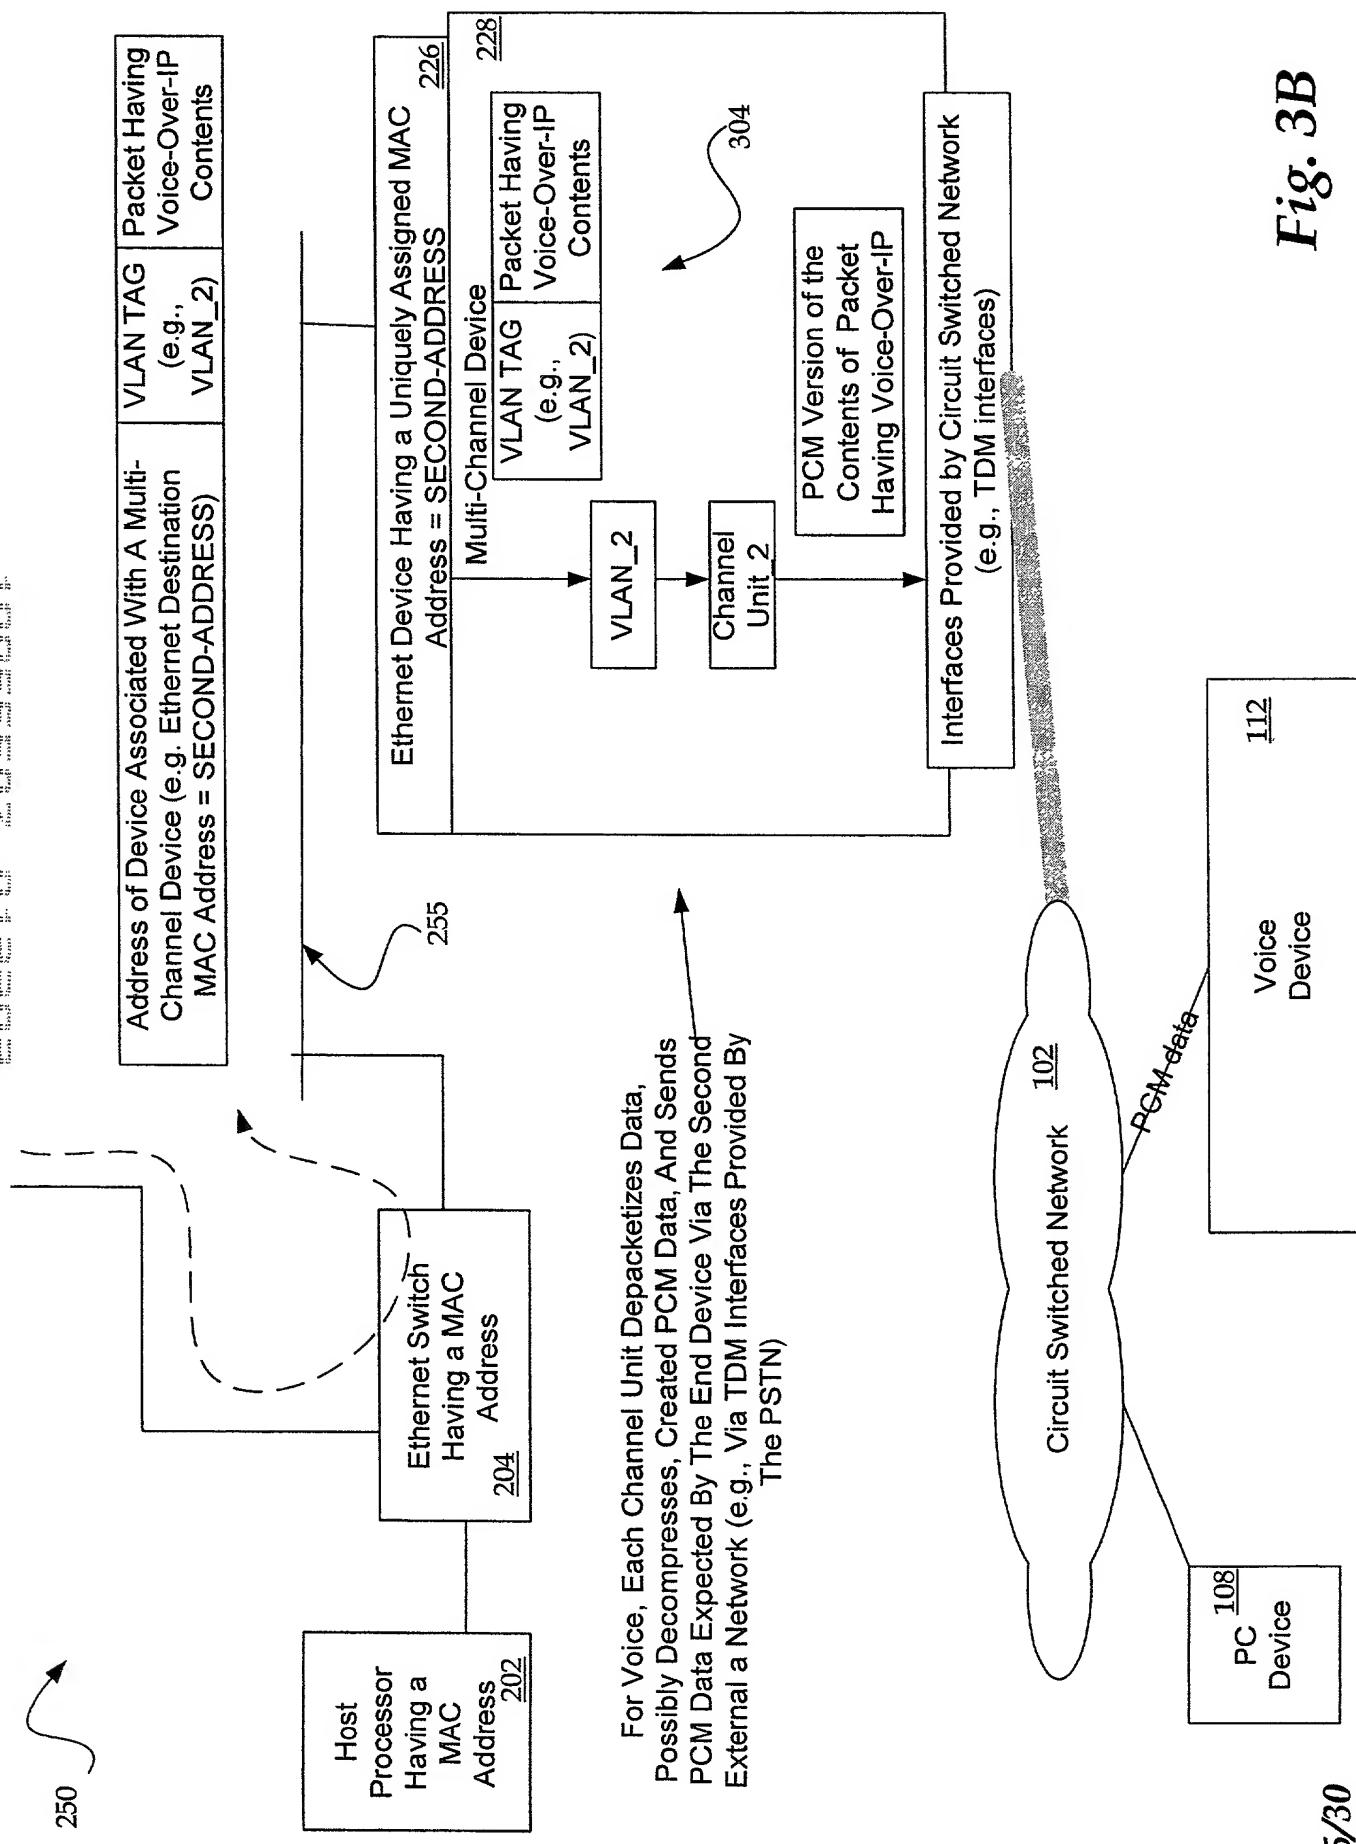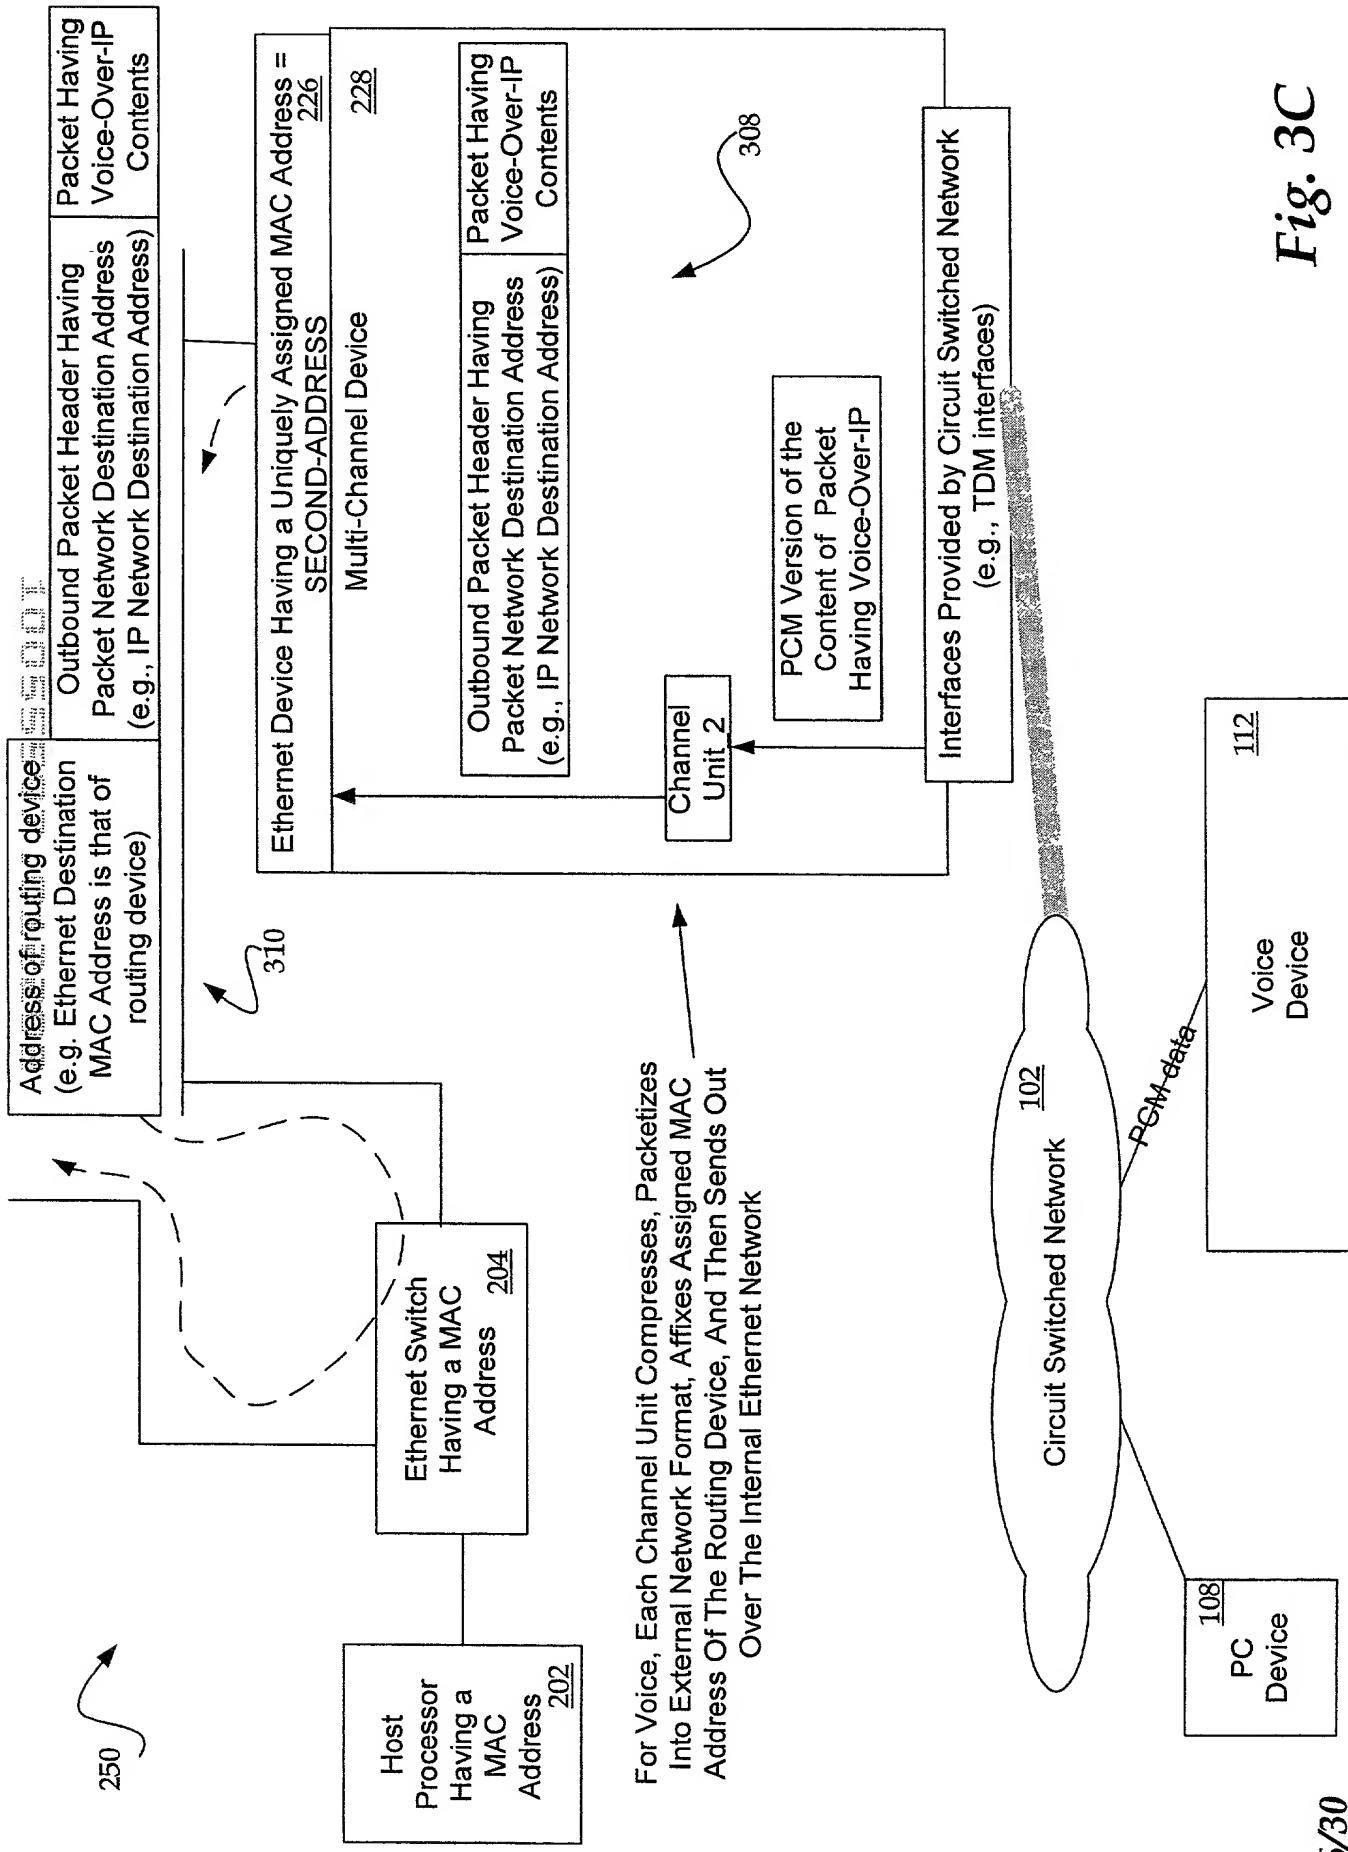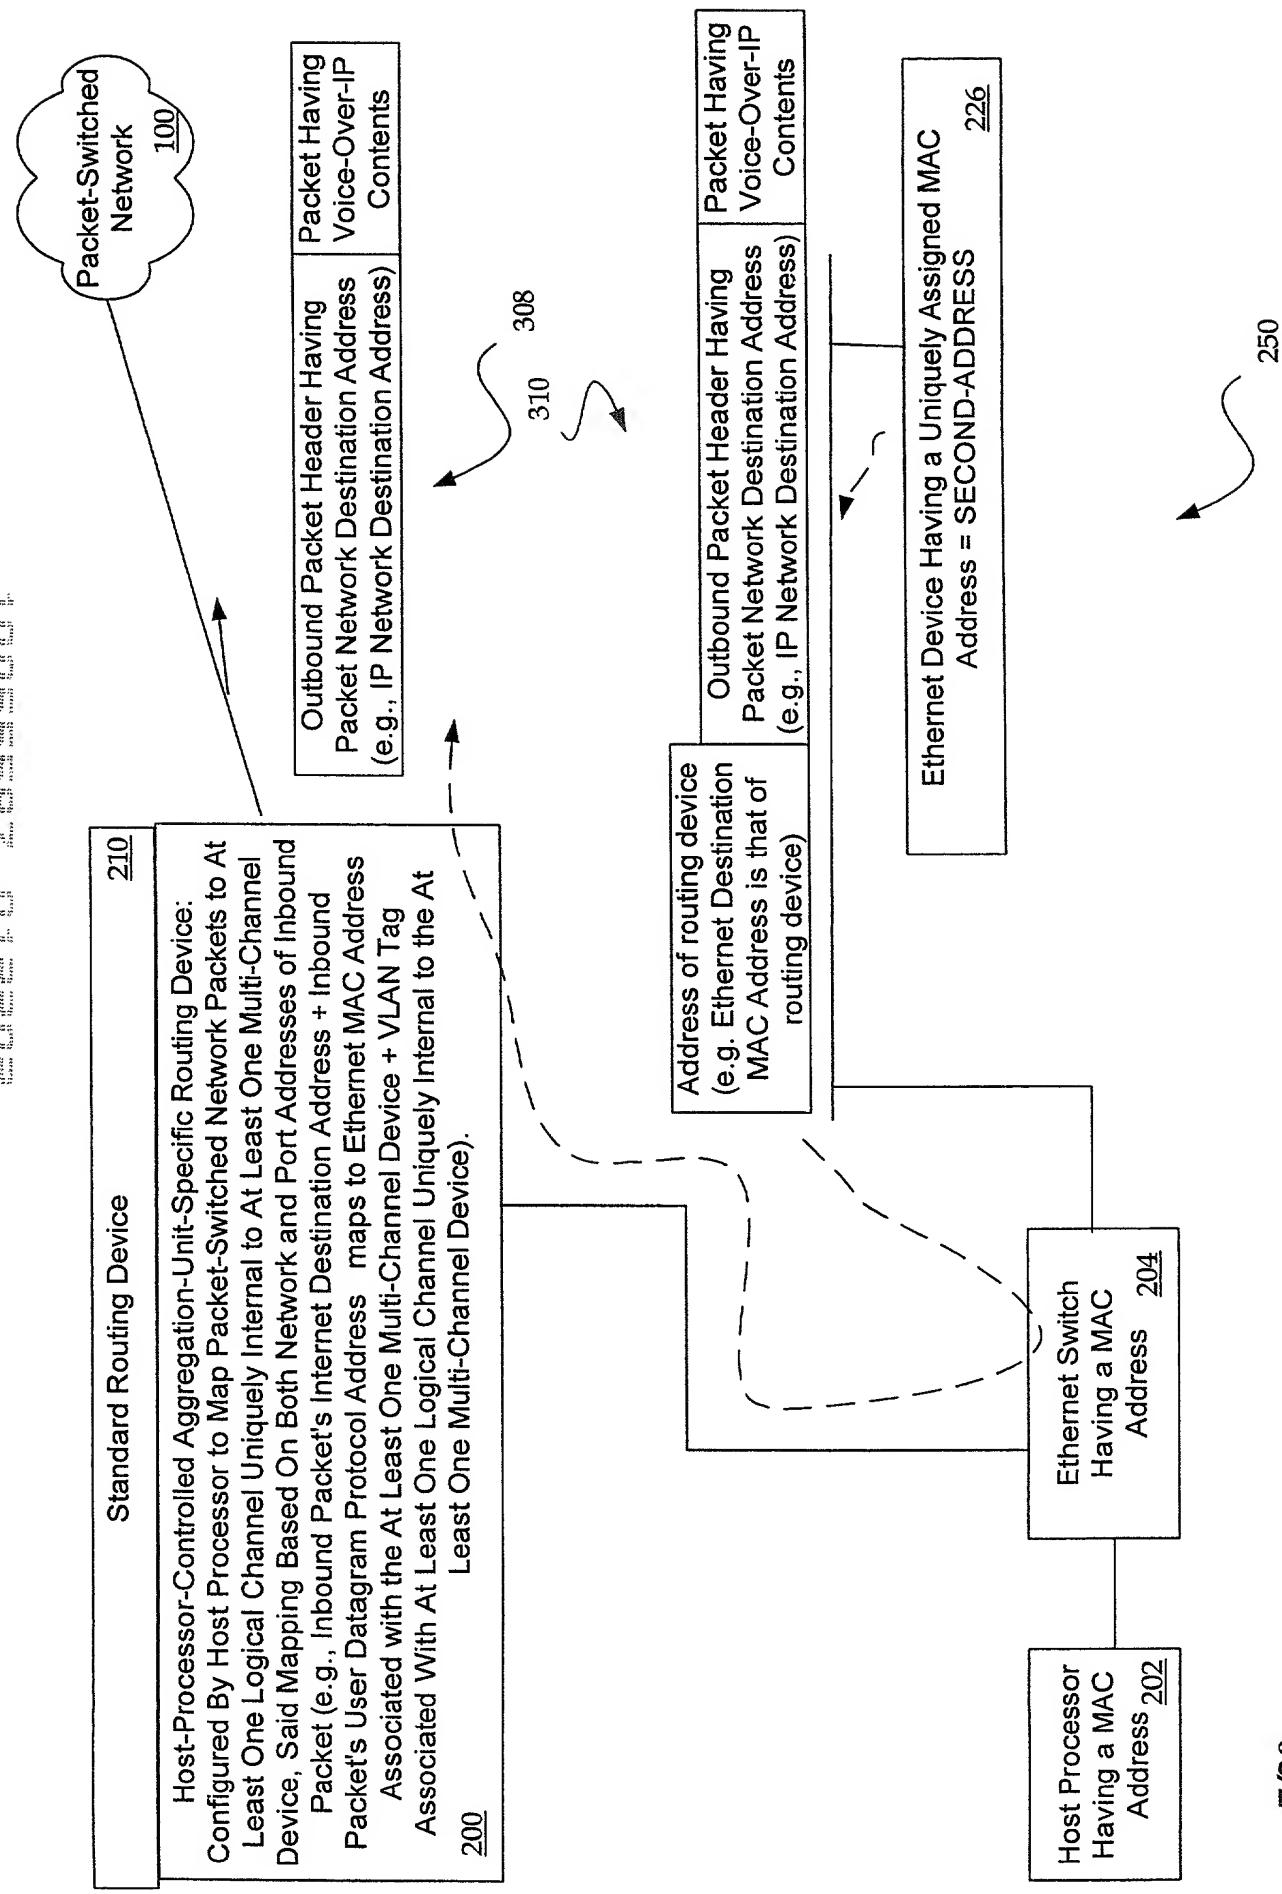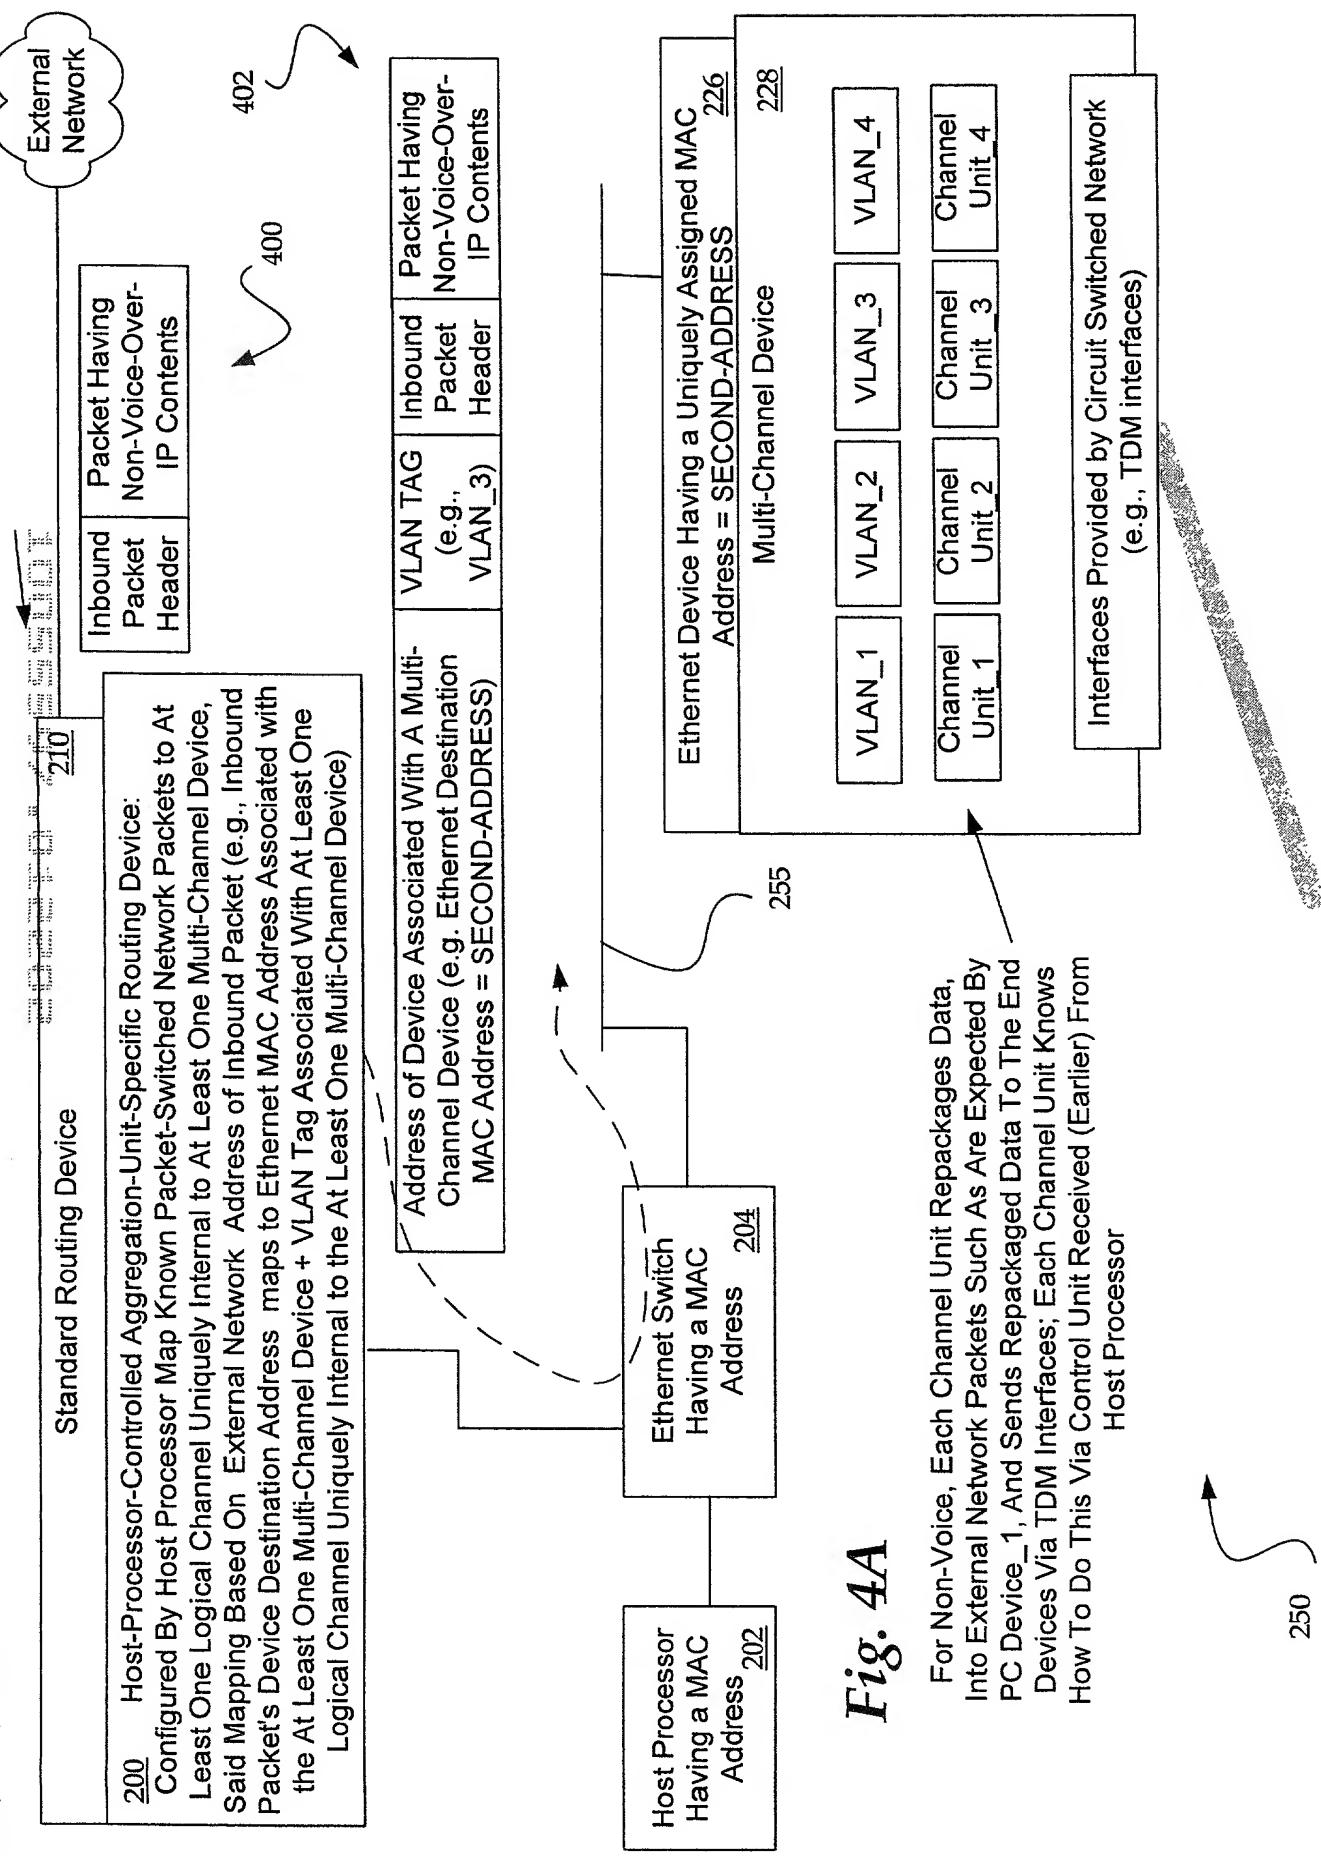


**Fig. 4A**

For Non-Voice, Each Channel Unit Repackages Data, Into External Network Packets Such As Are Expected By PC Device\_1, And Sends Repackaged Data To The End Devices Via TDM Interfaces; Each Channel Unit Knows How To Do This Via Control Unit Received (Earlier) From Host Processor

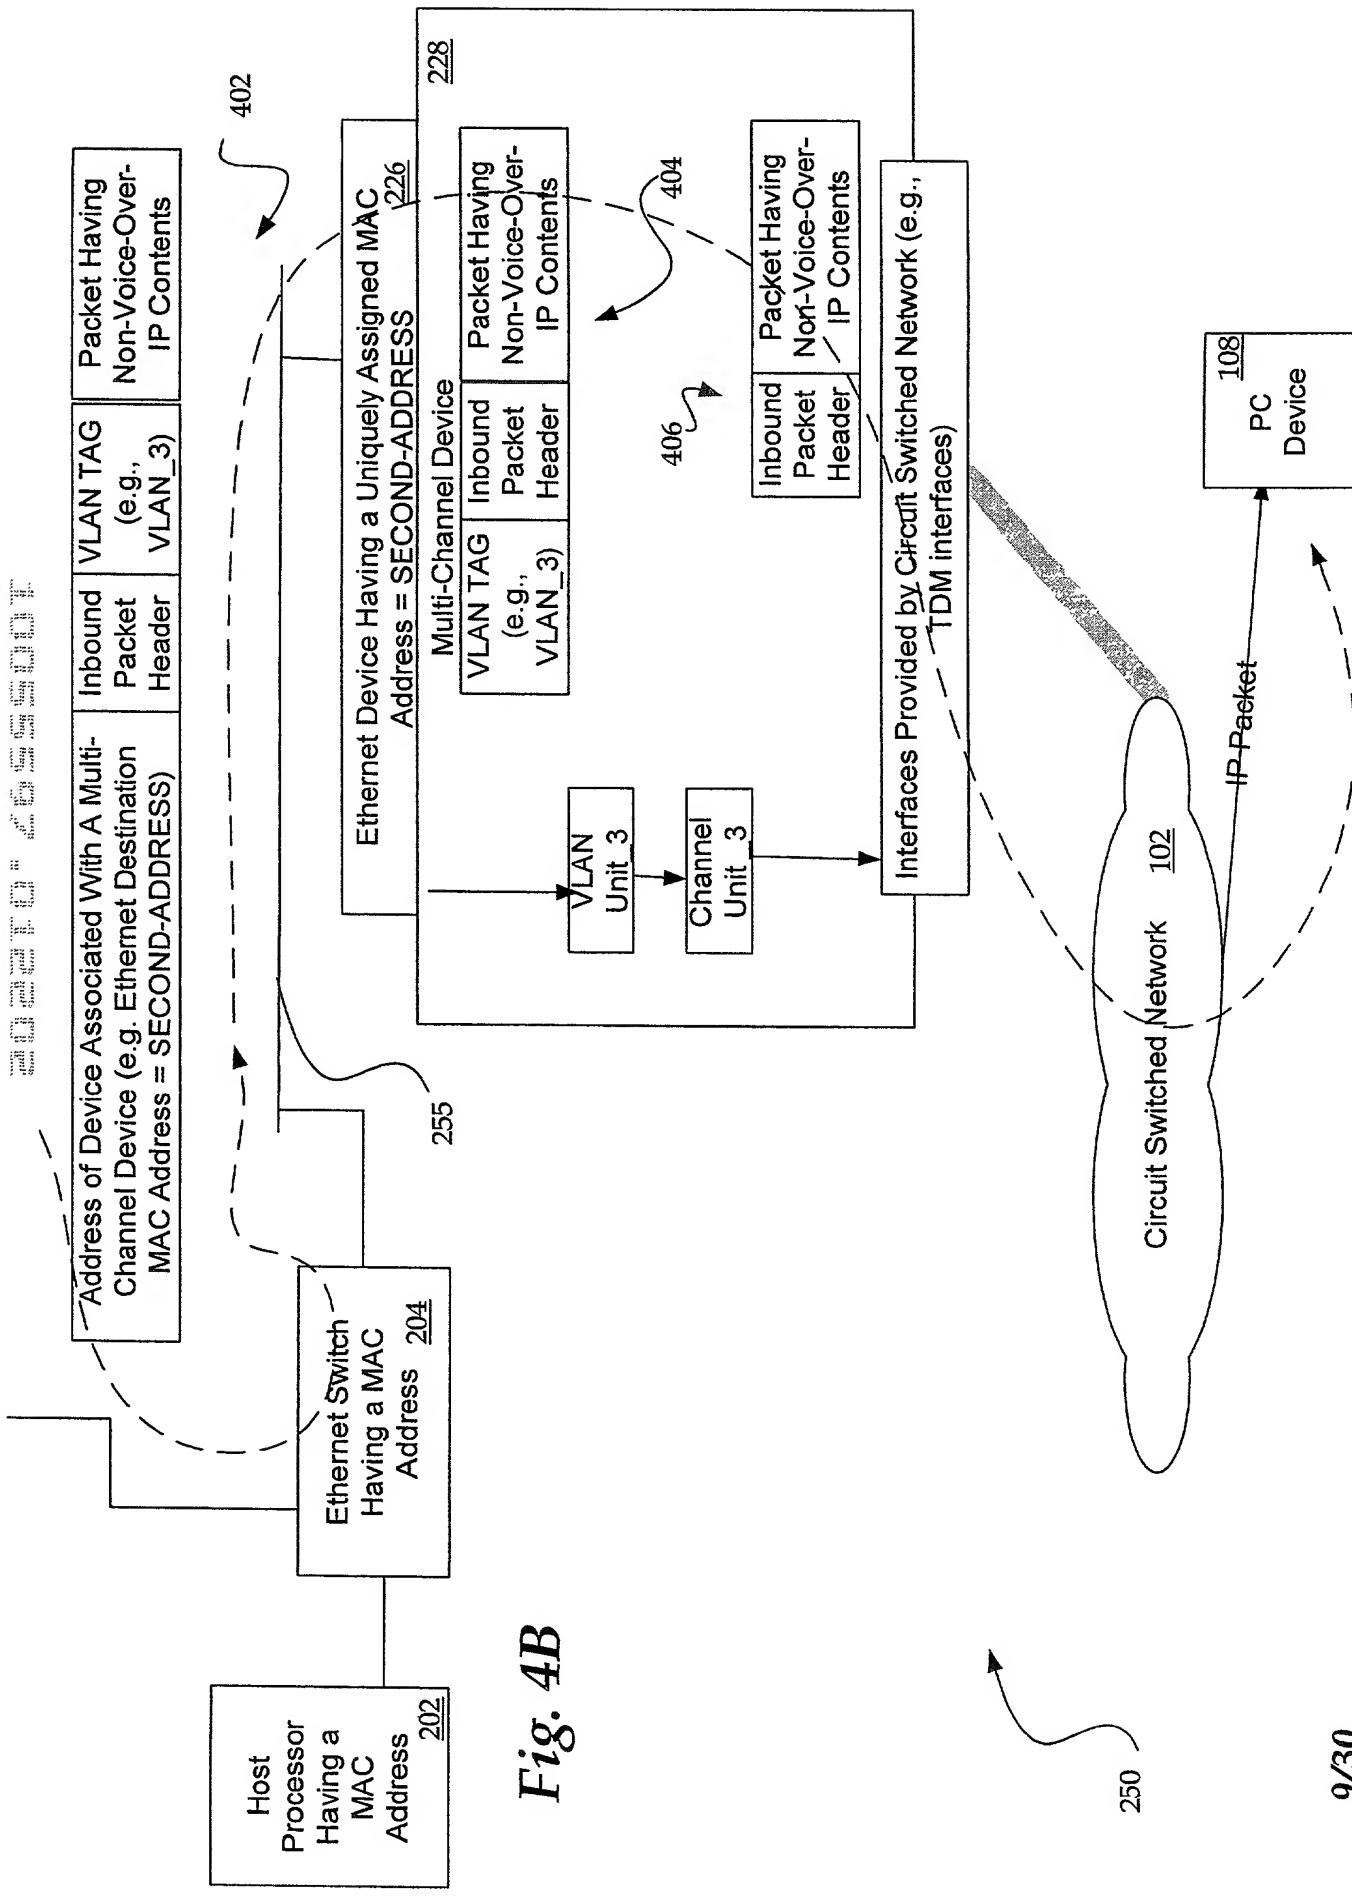


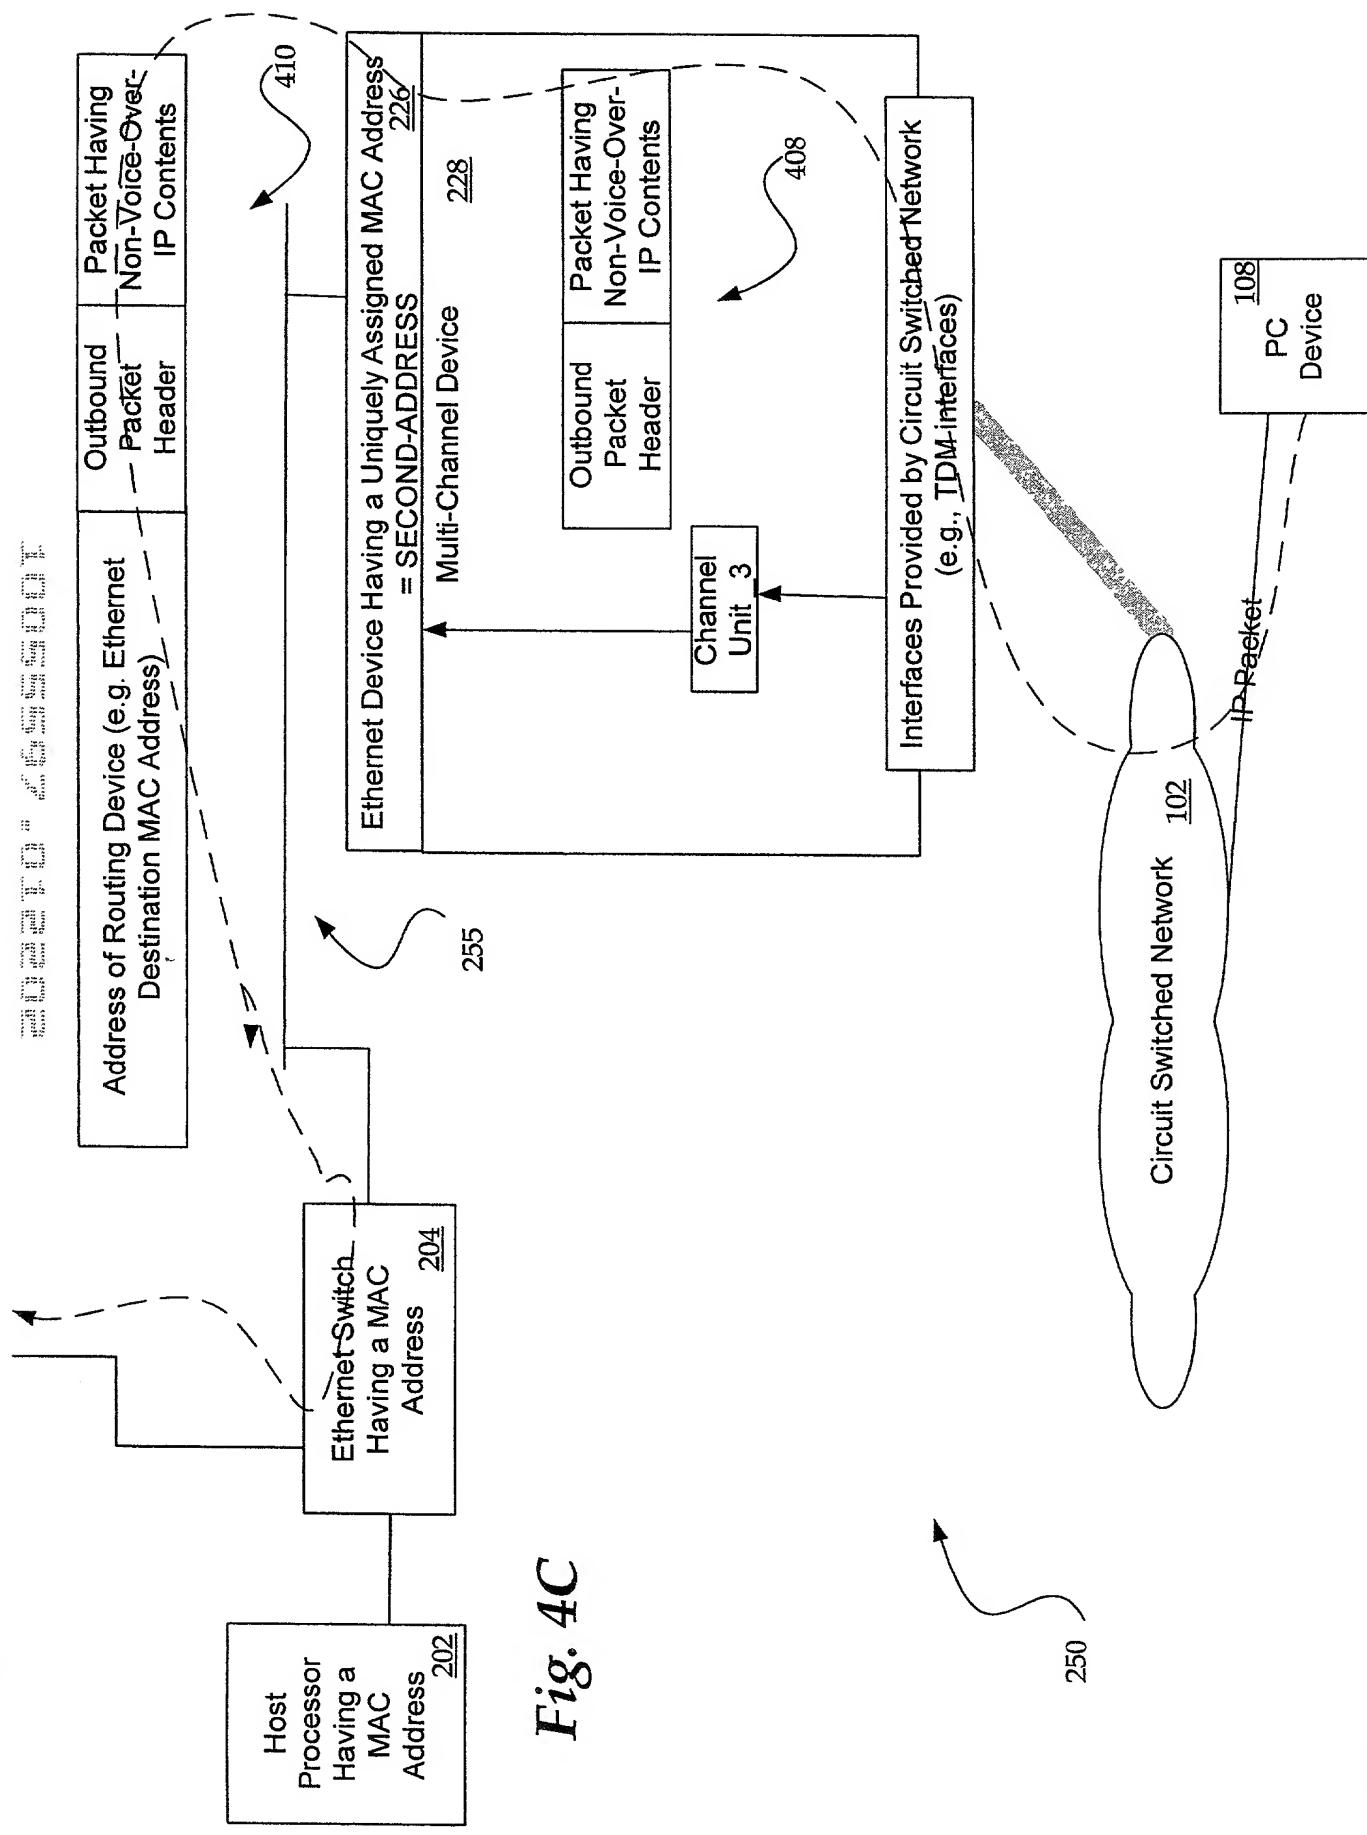**Fig. 4C**

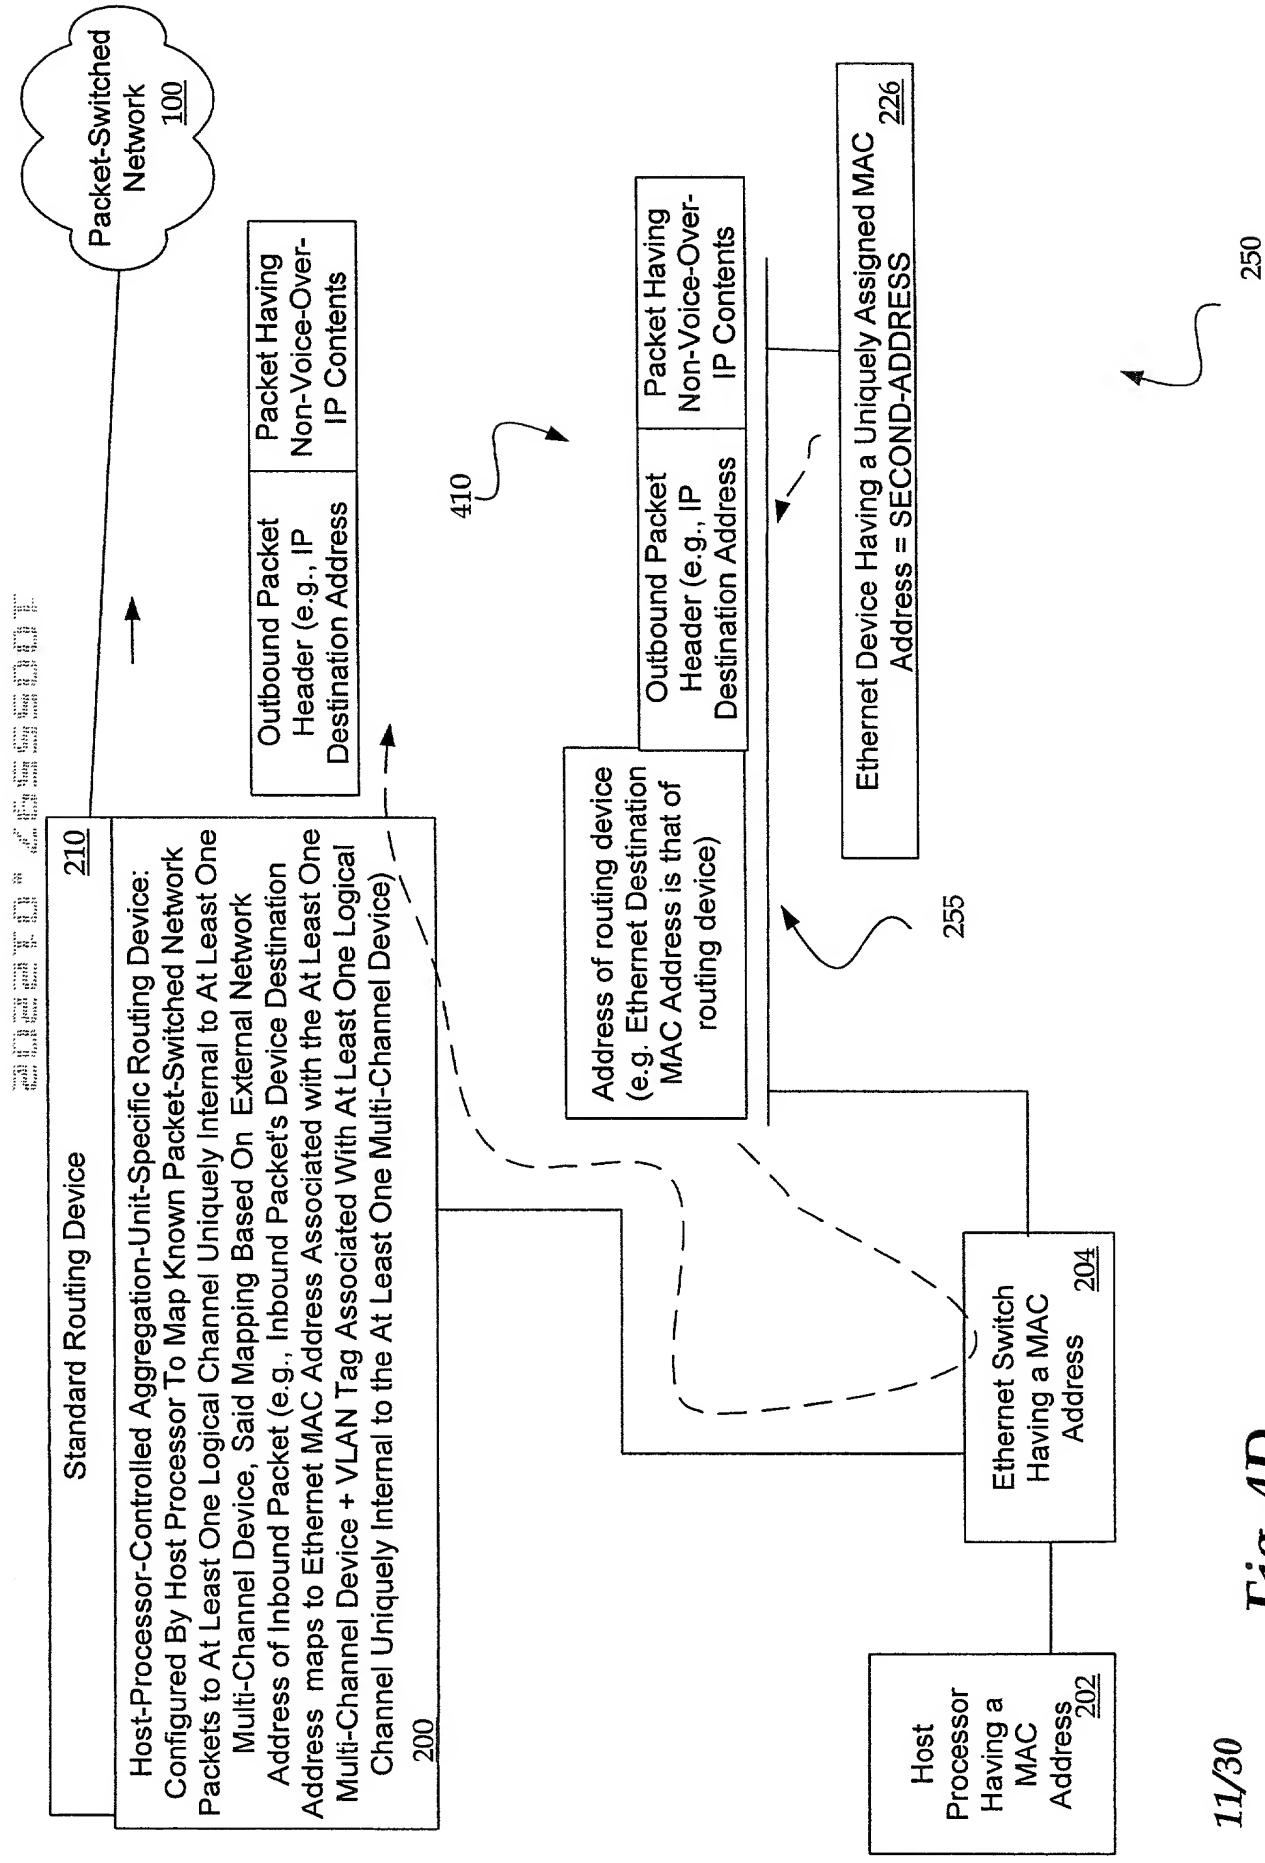


11/30

Fig. 4D

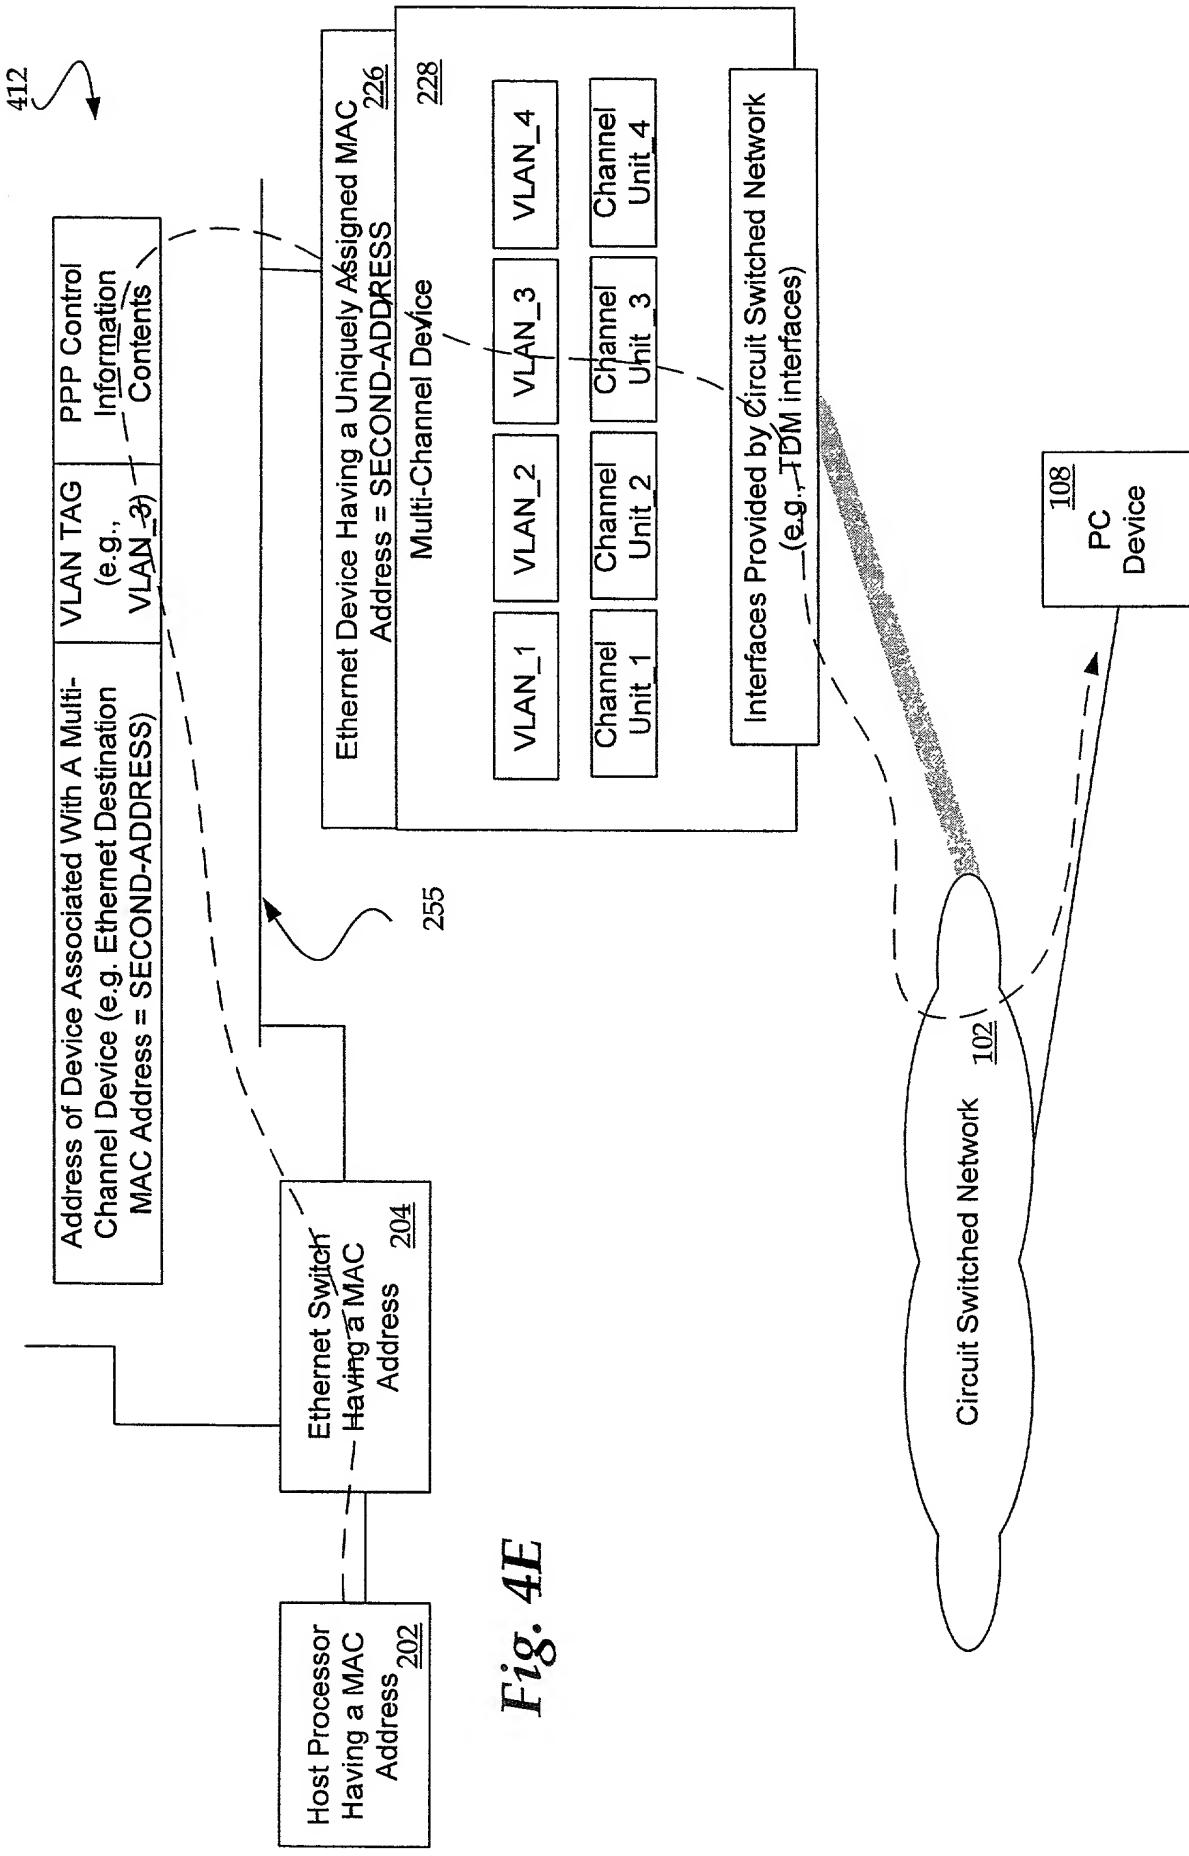

**Fig. 4E**

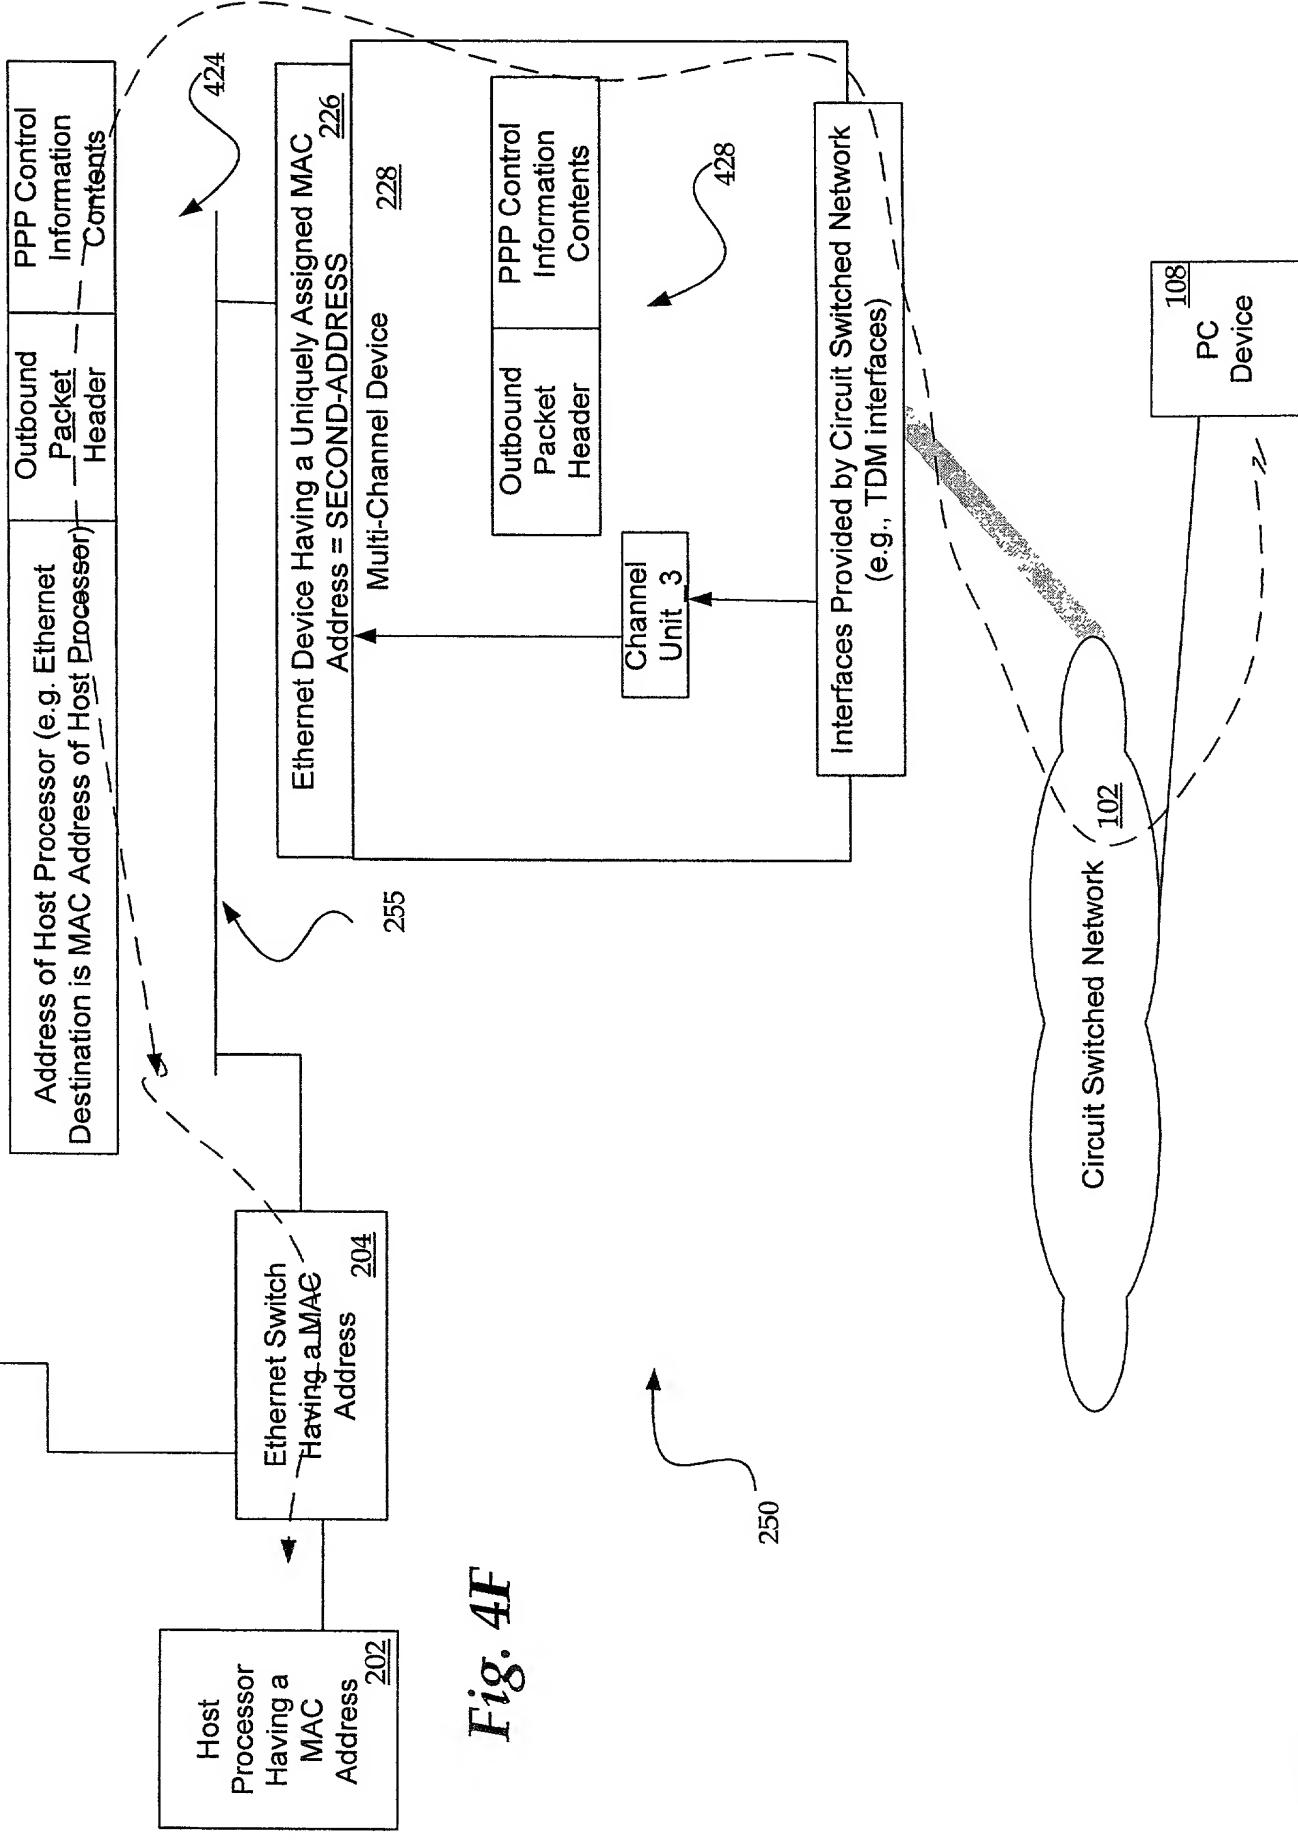**Fig. 4F**

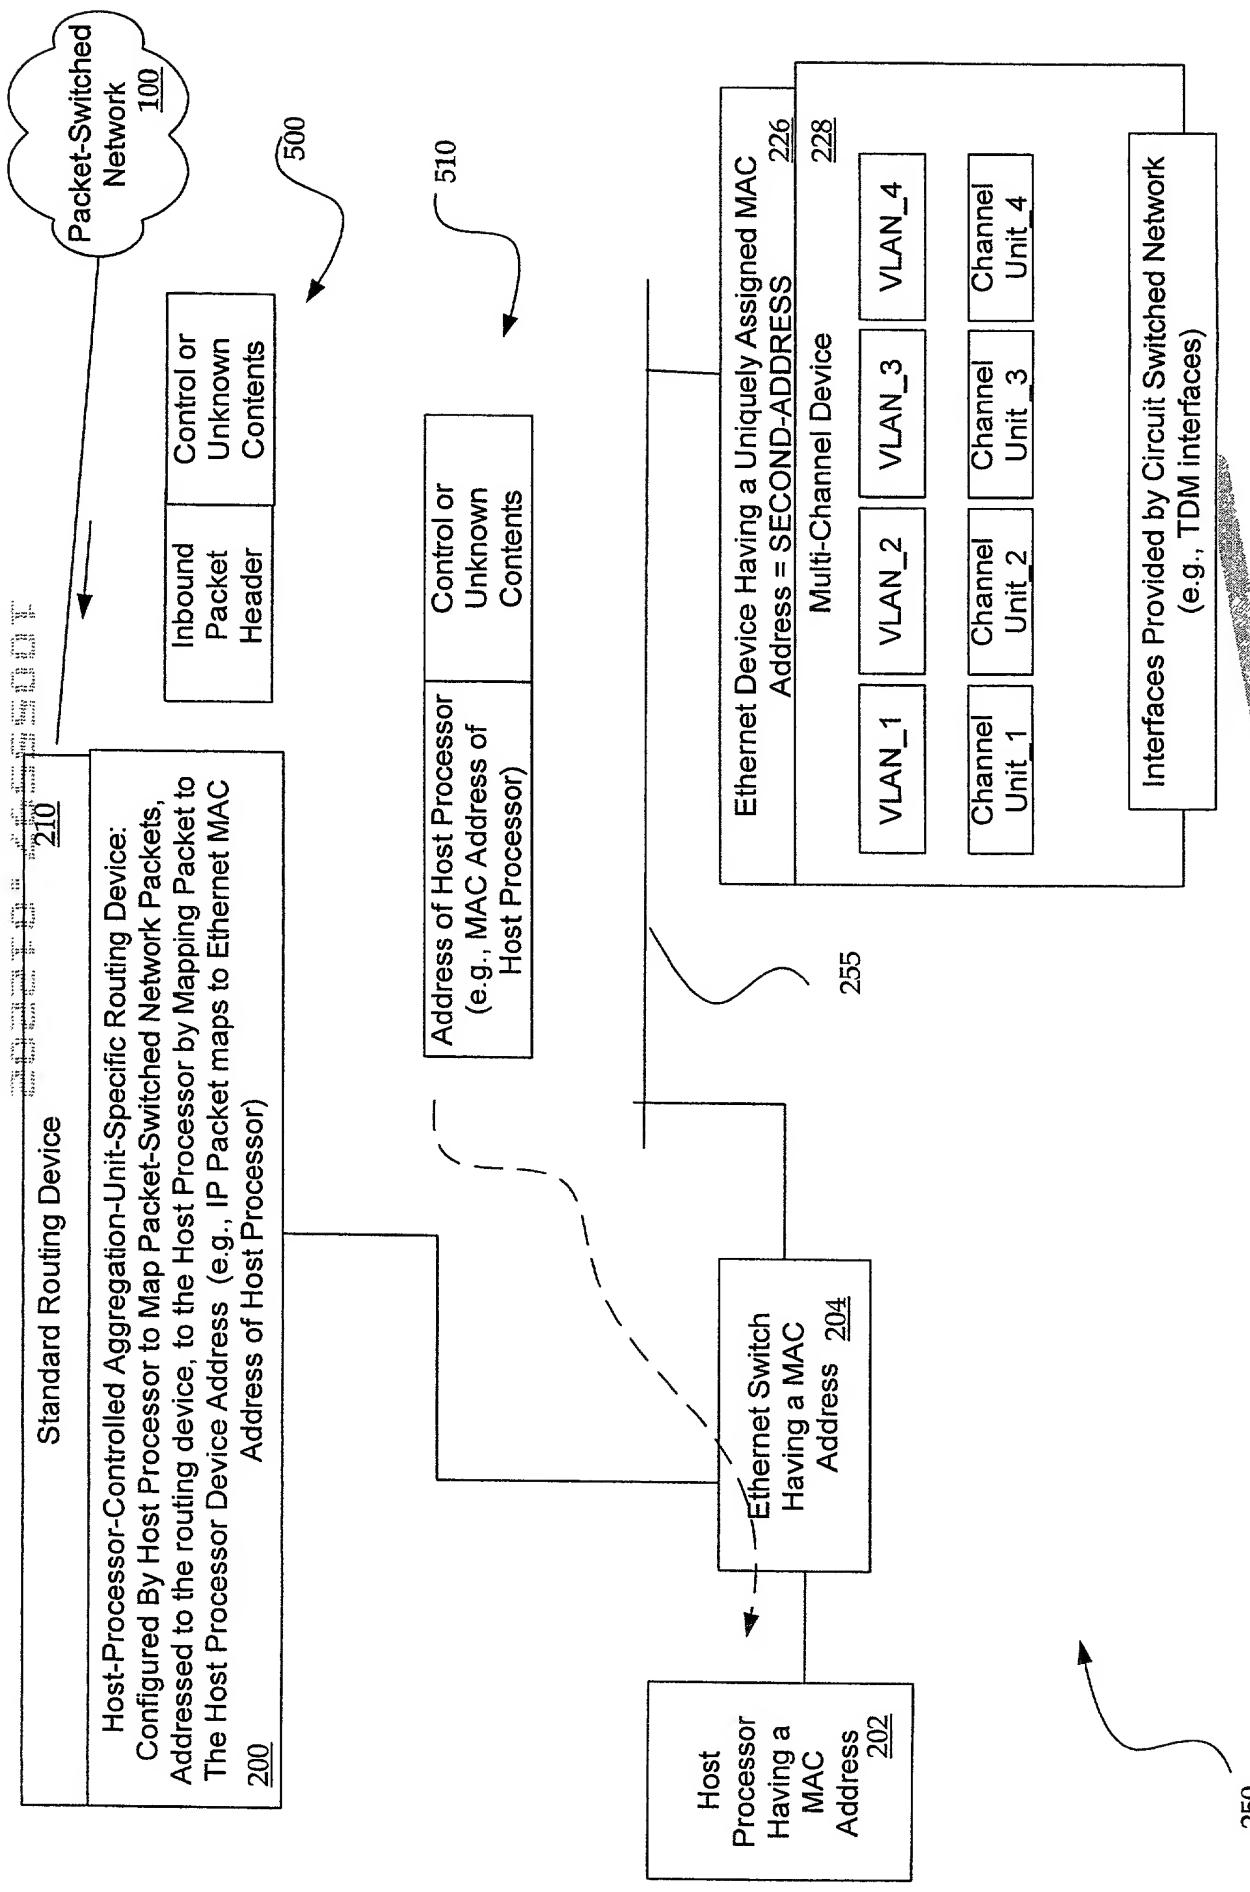


Fig. 5

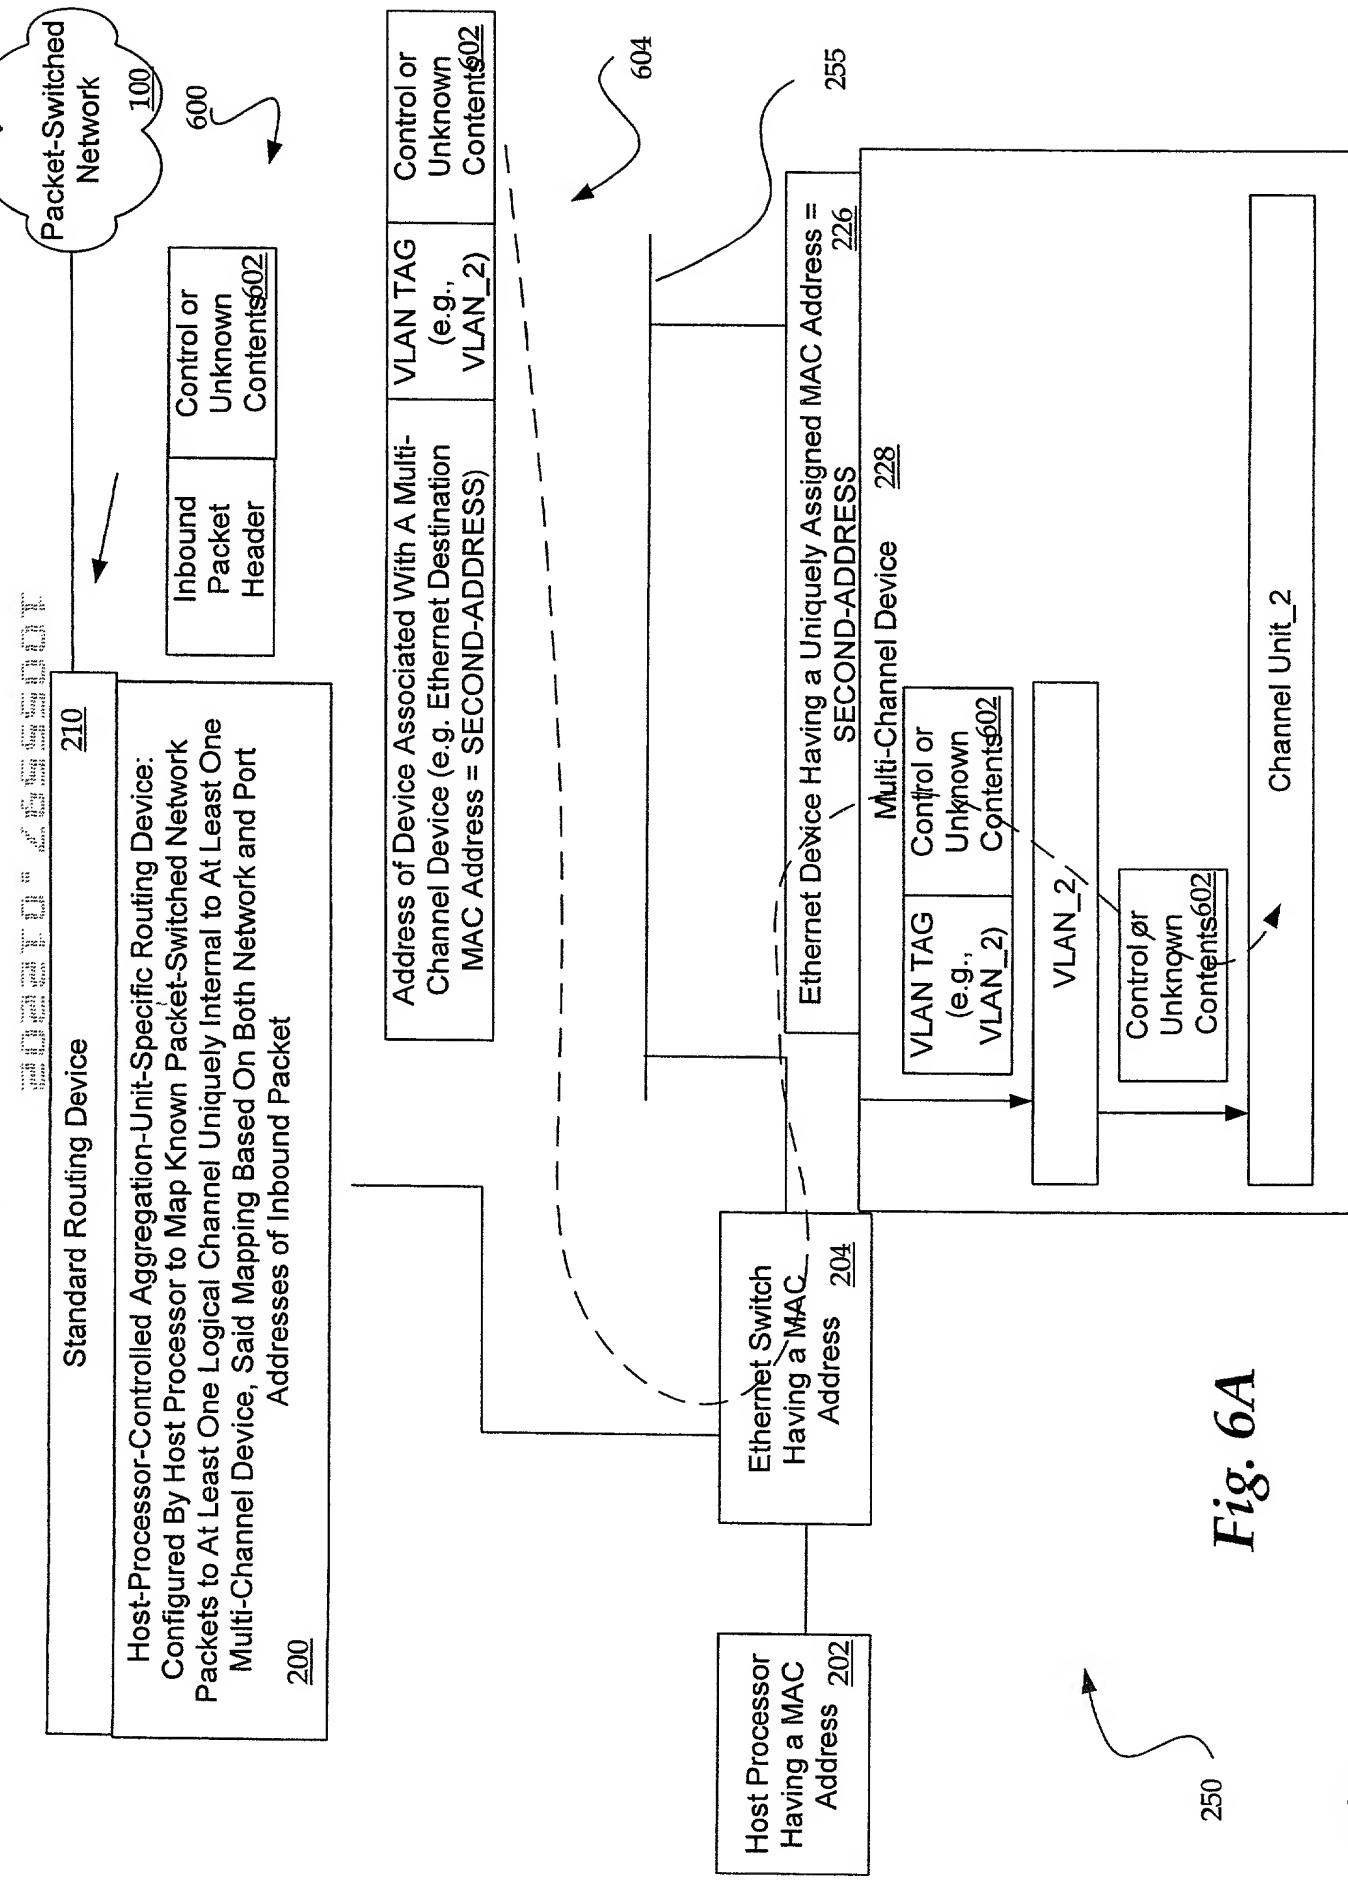


Fig. 6A




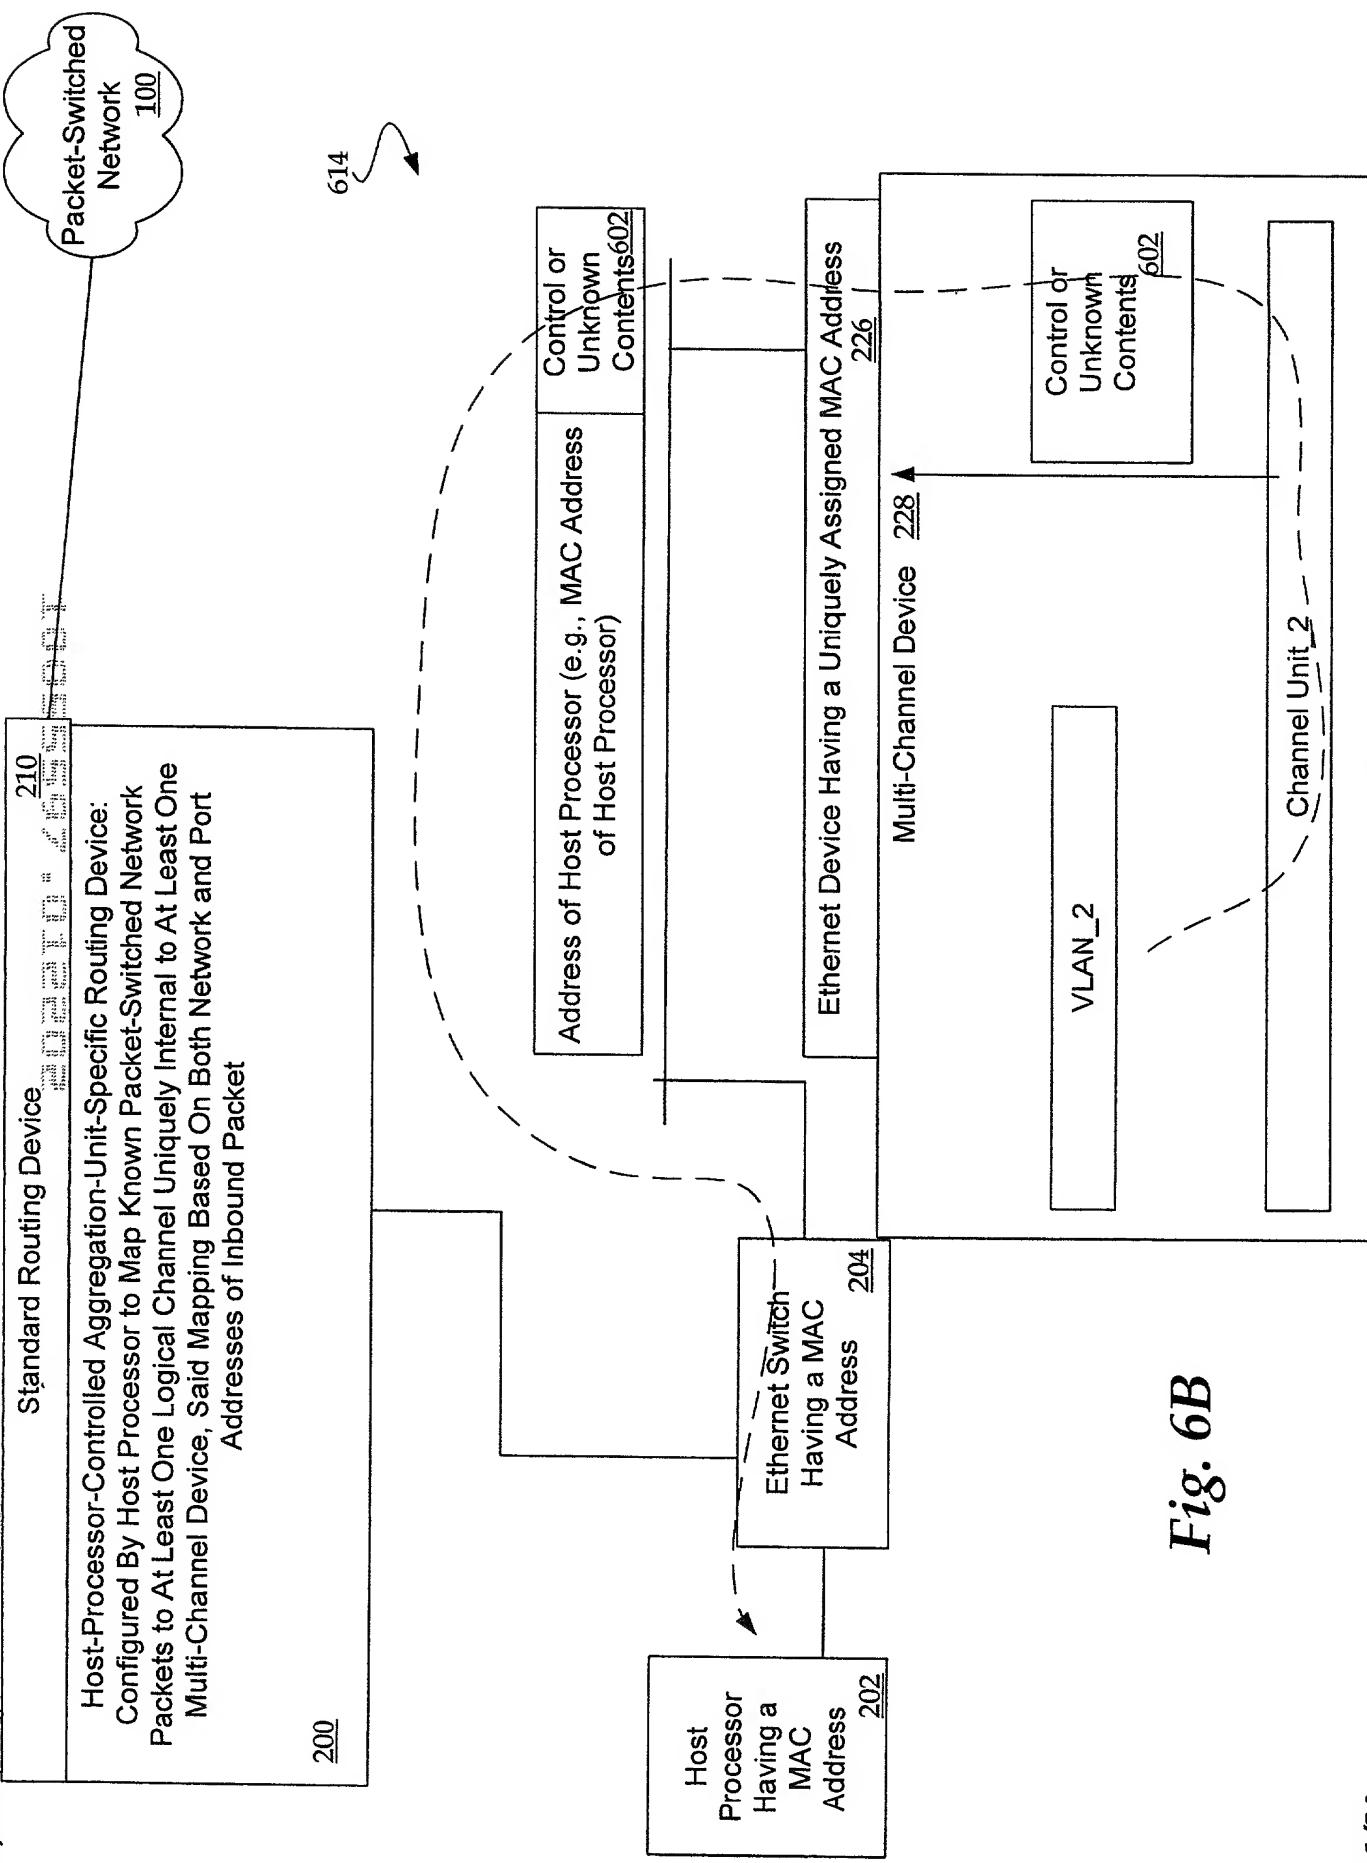



Fig. 6B

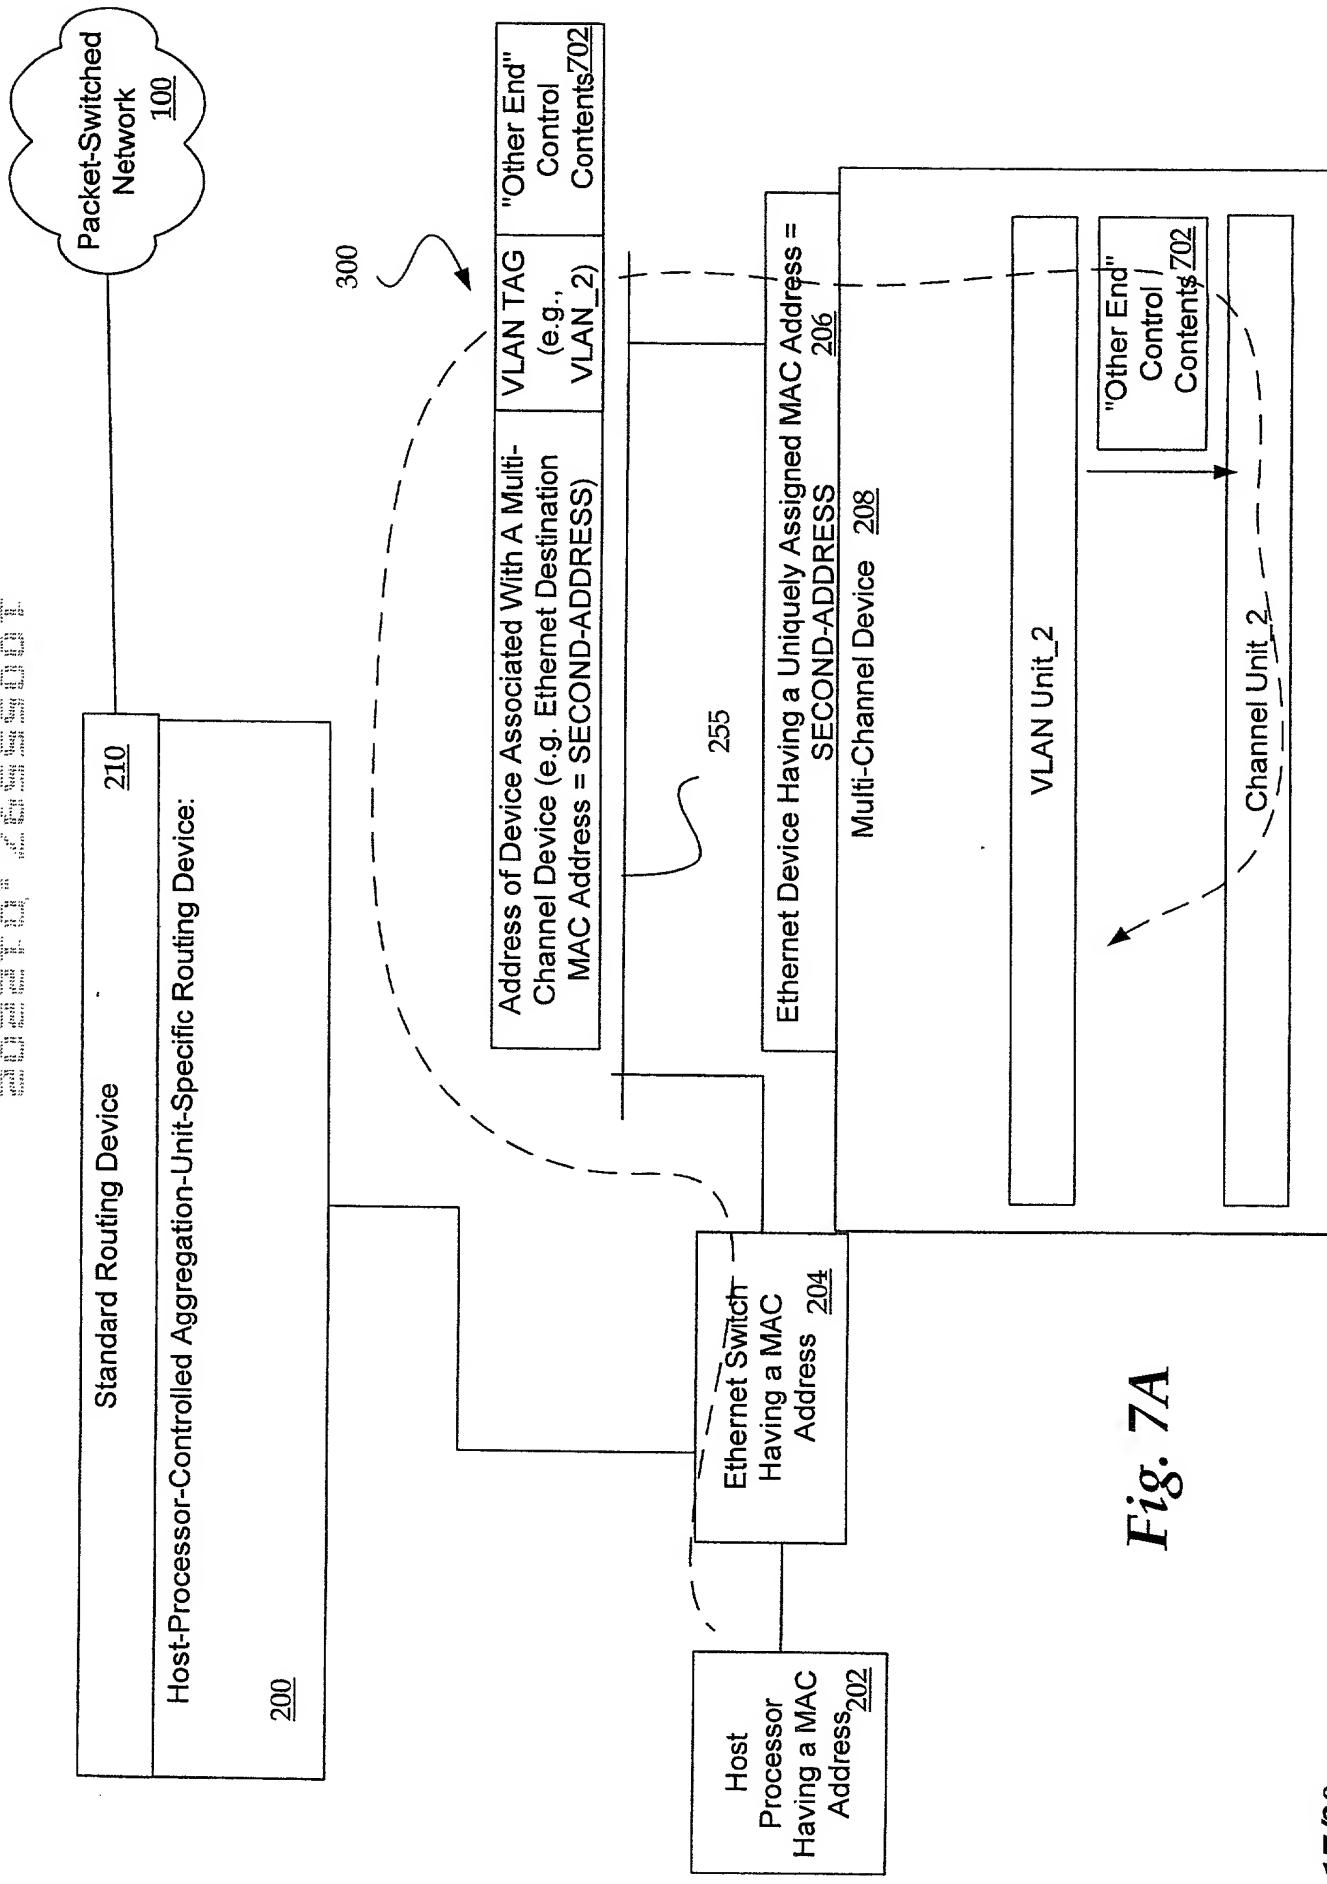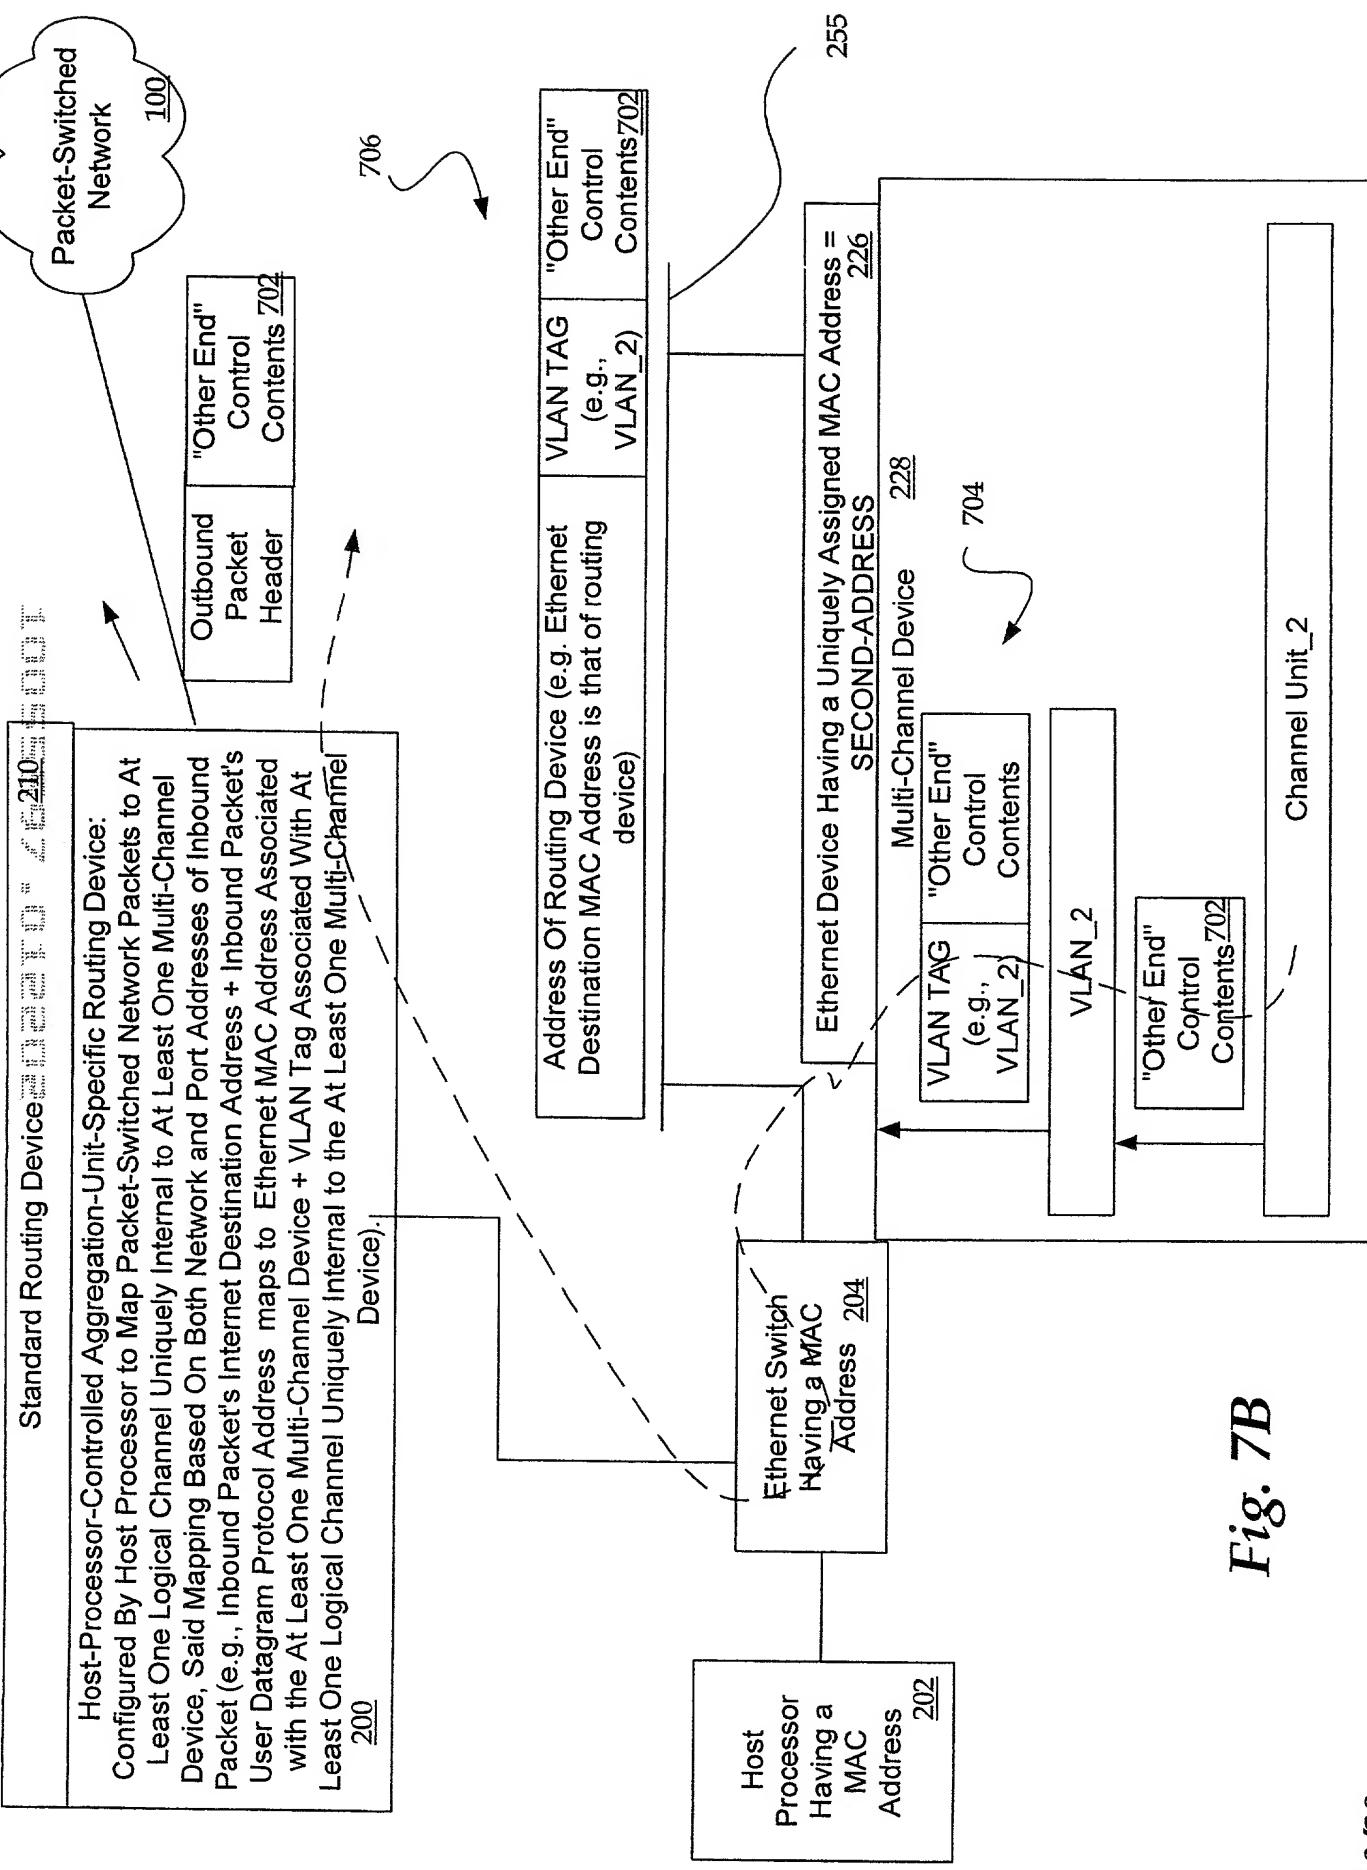


*Fig. 7B*

*Fig. 8A*

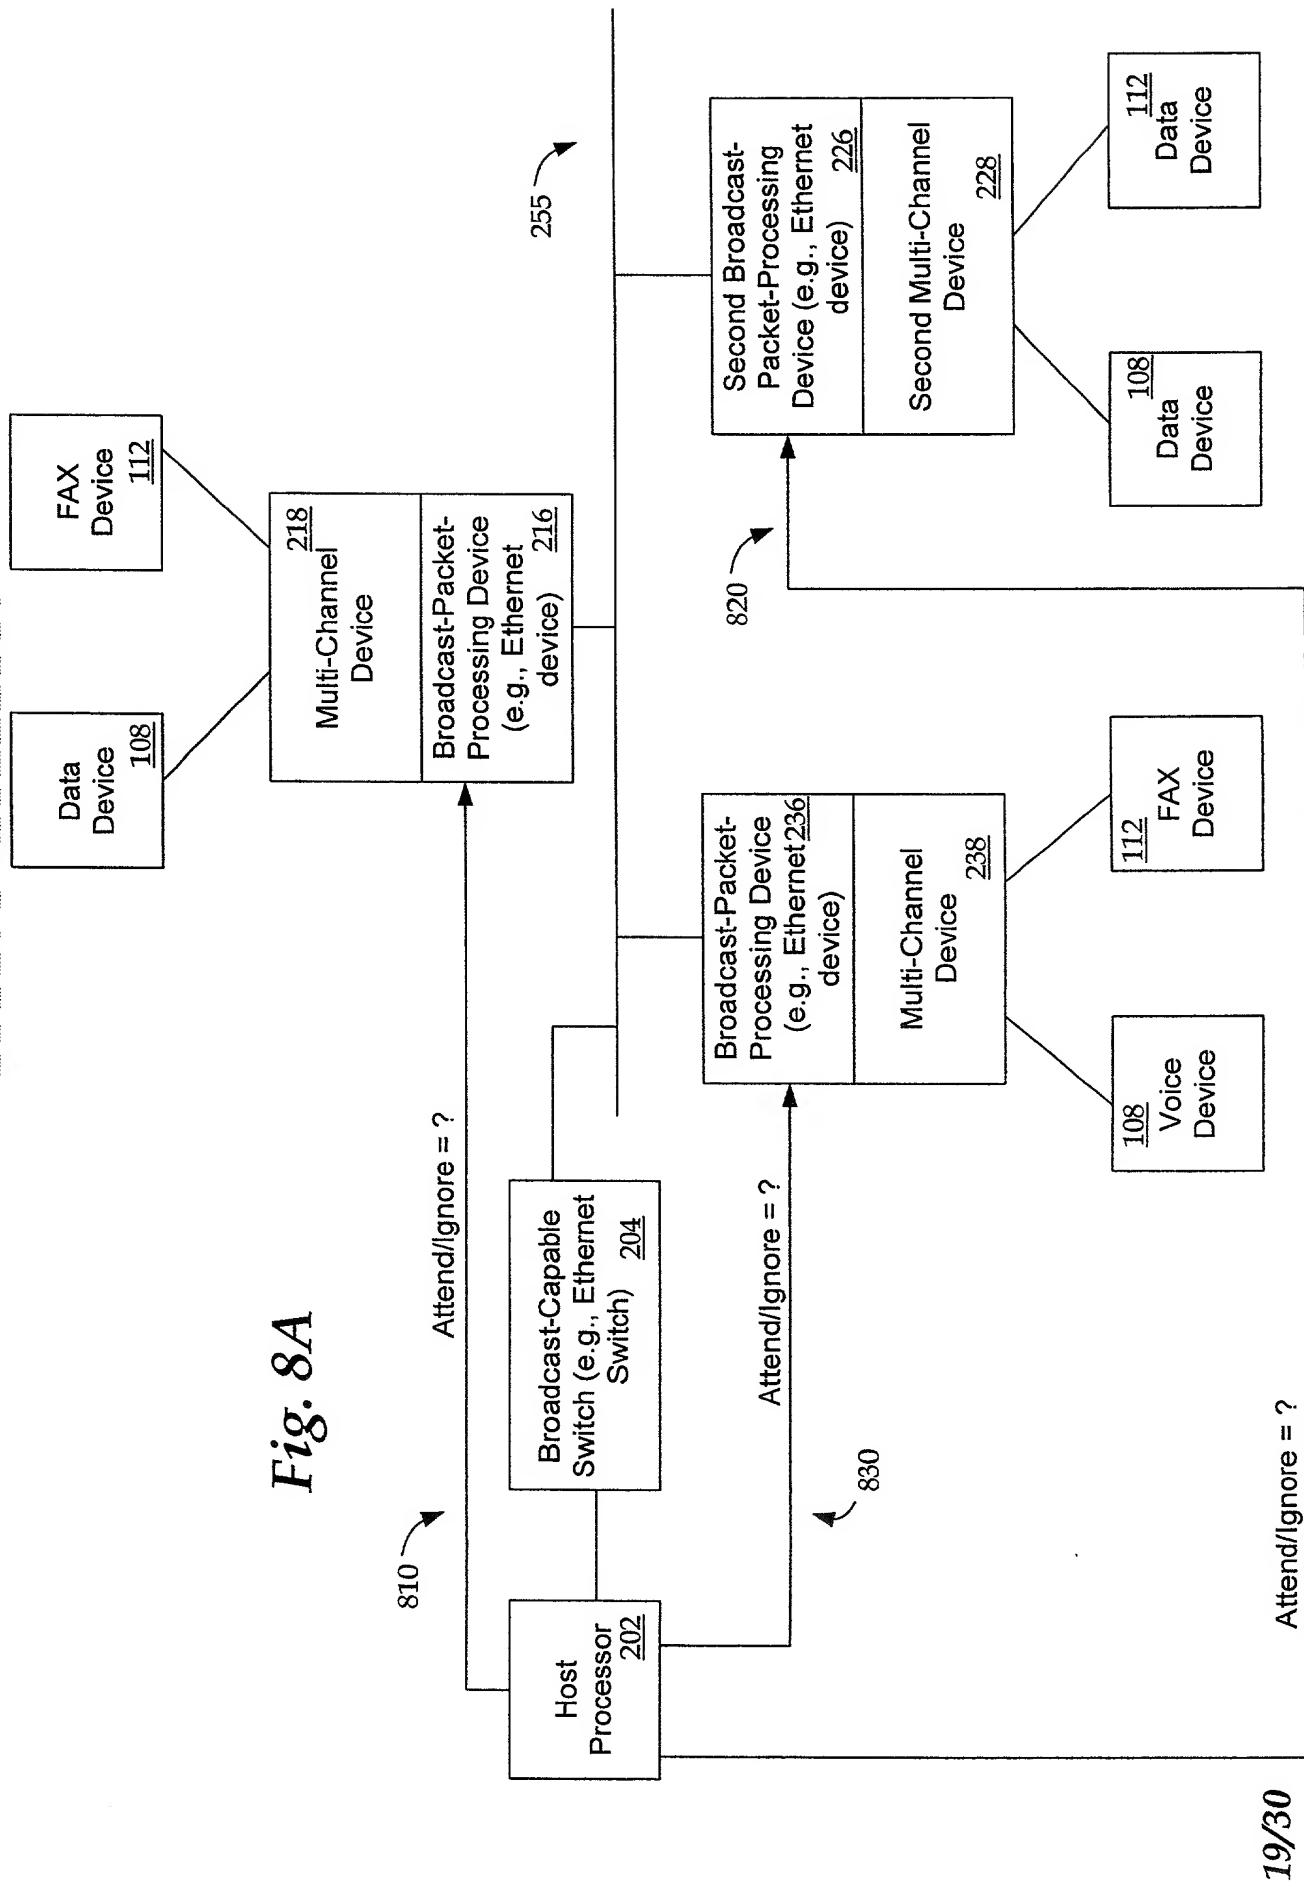

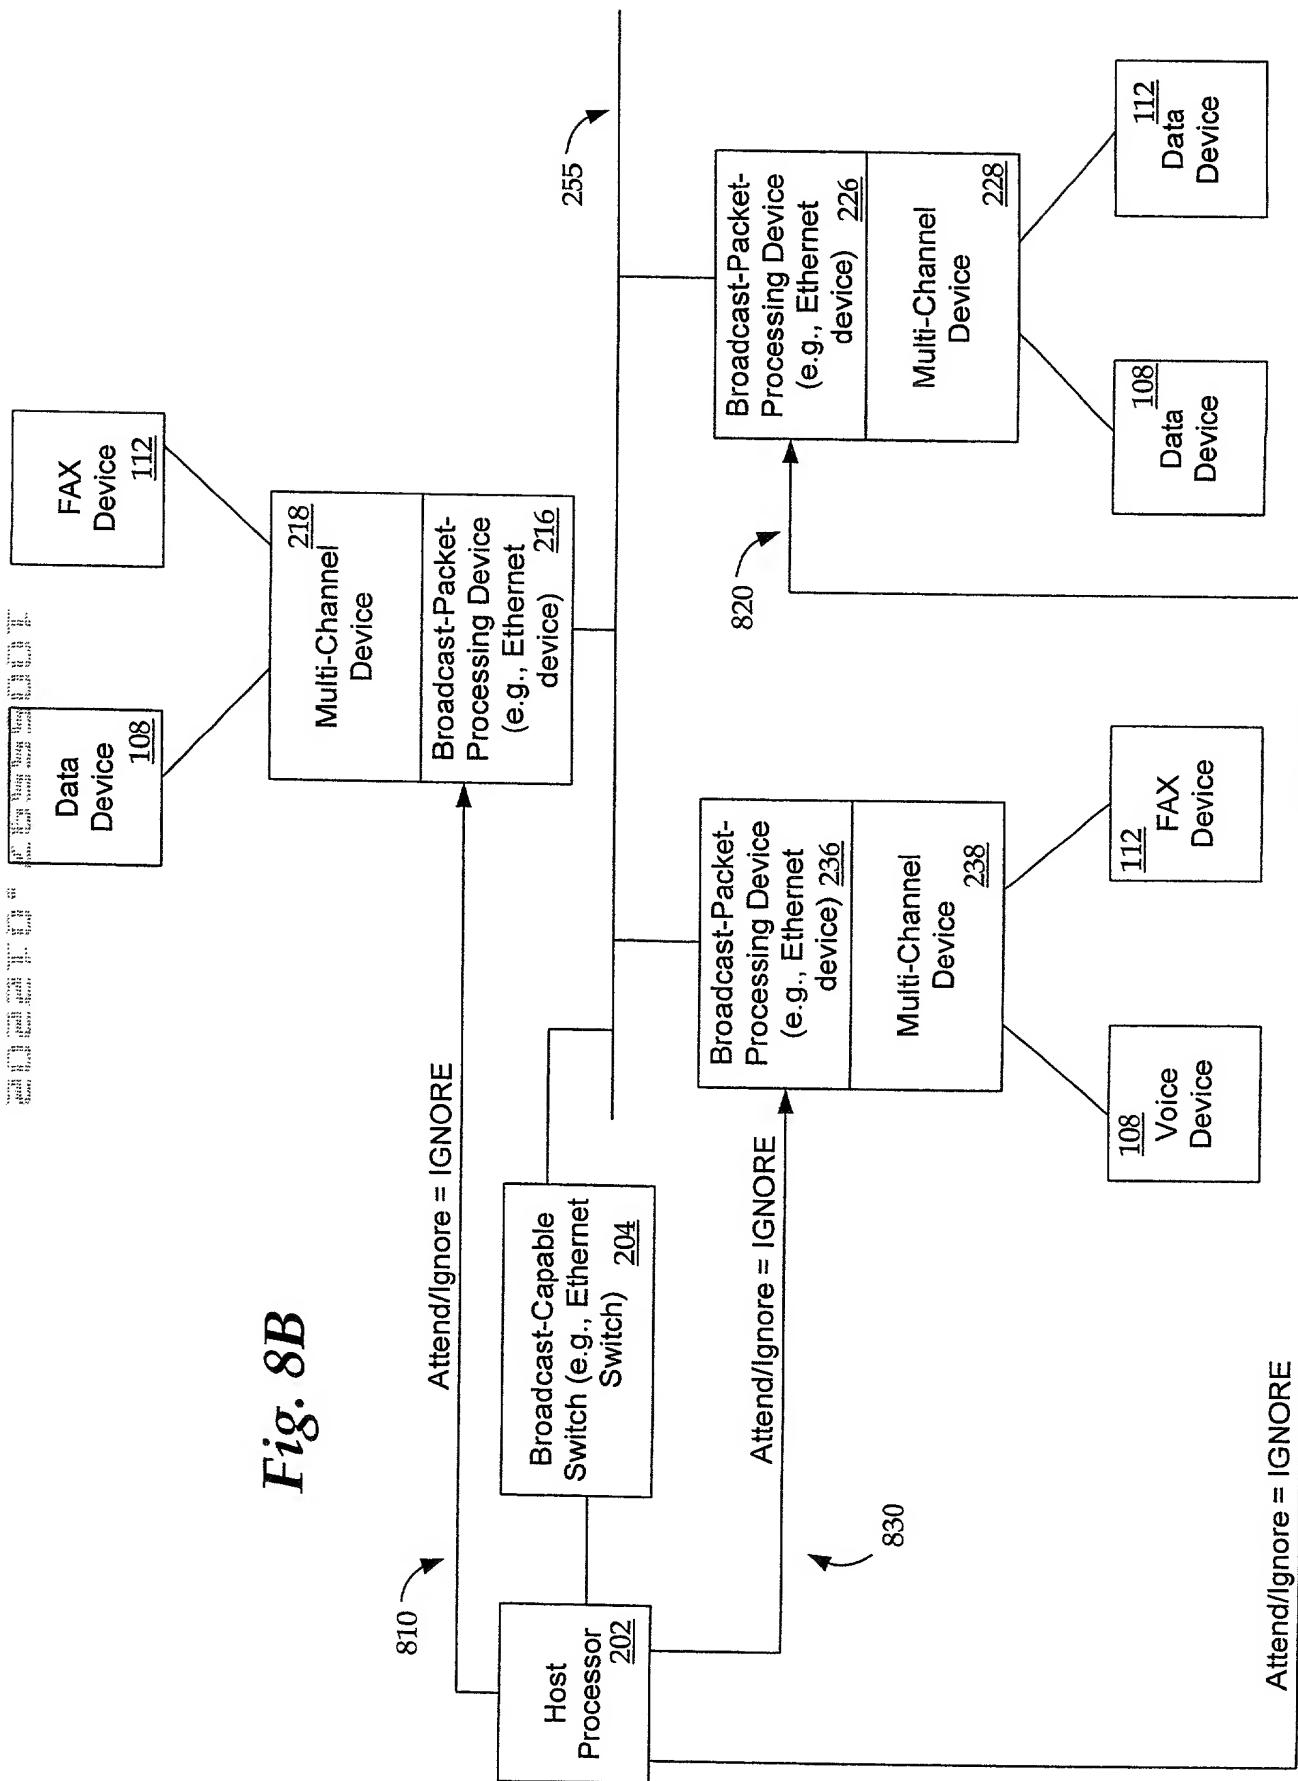*Fig. 8B*

*Fig. 8C*

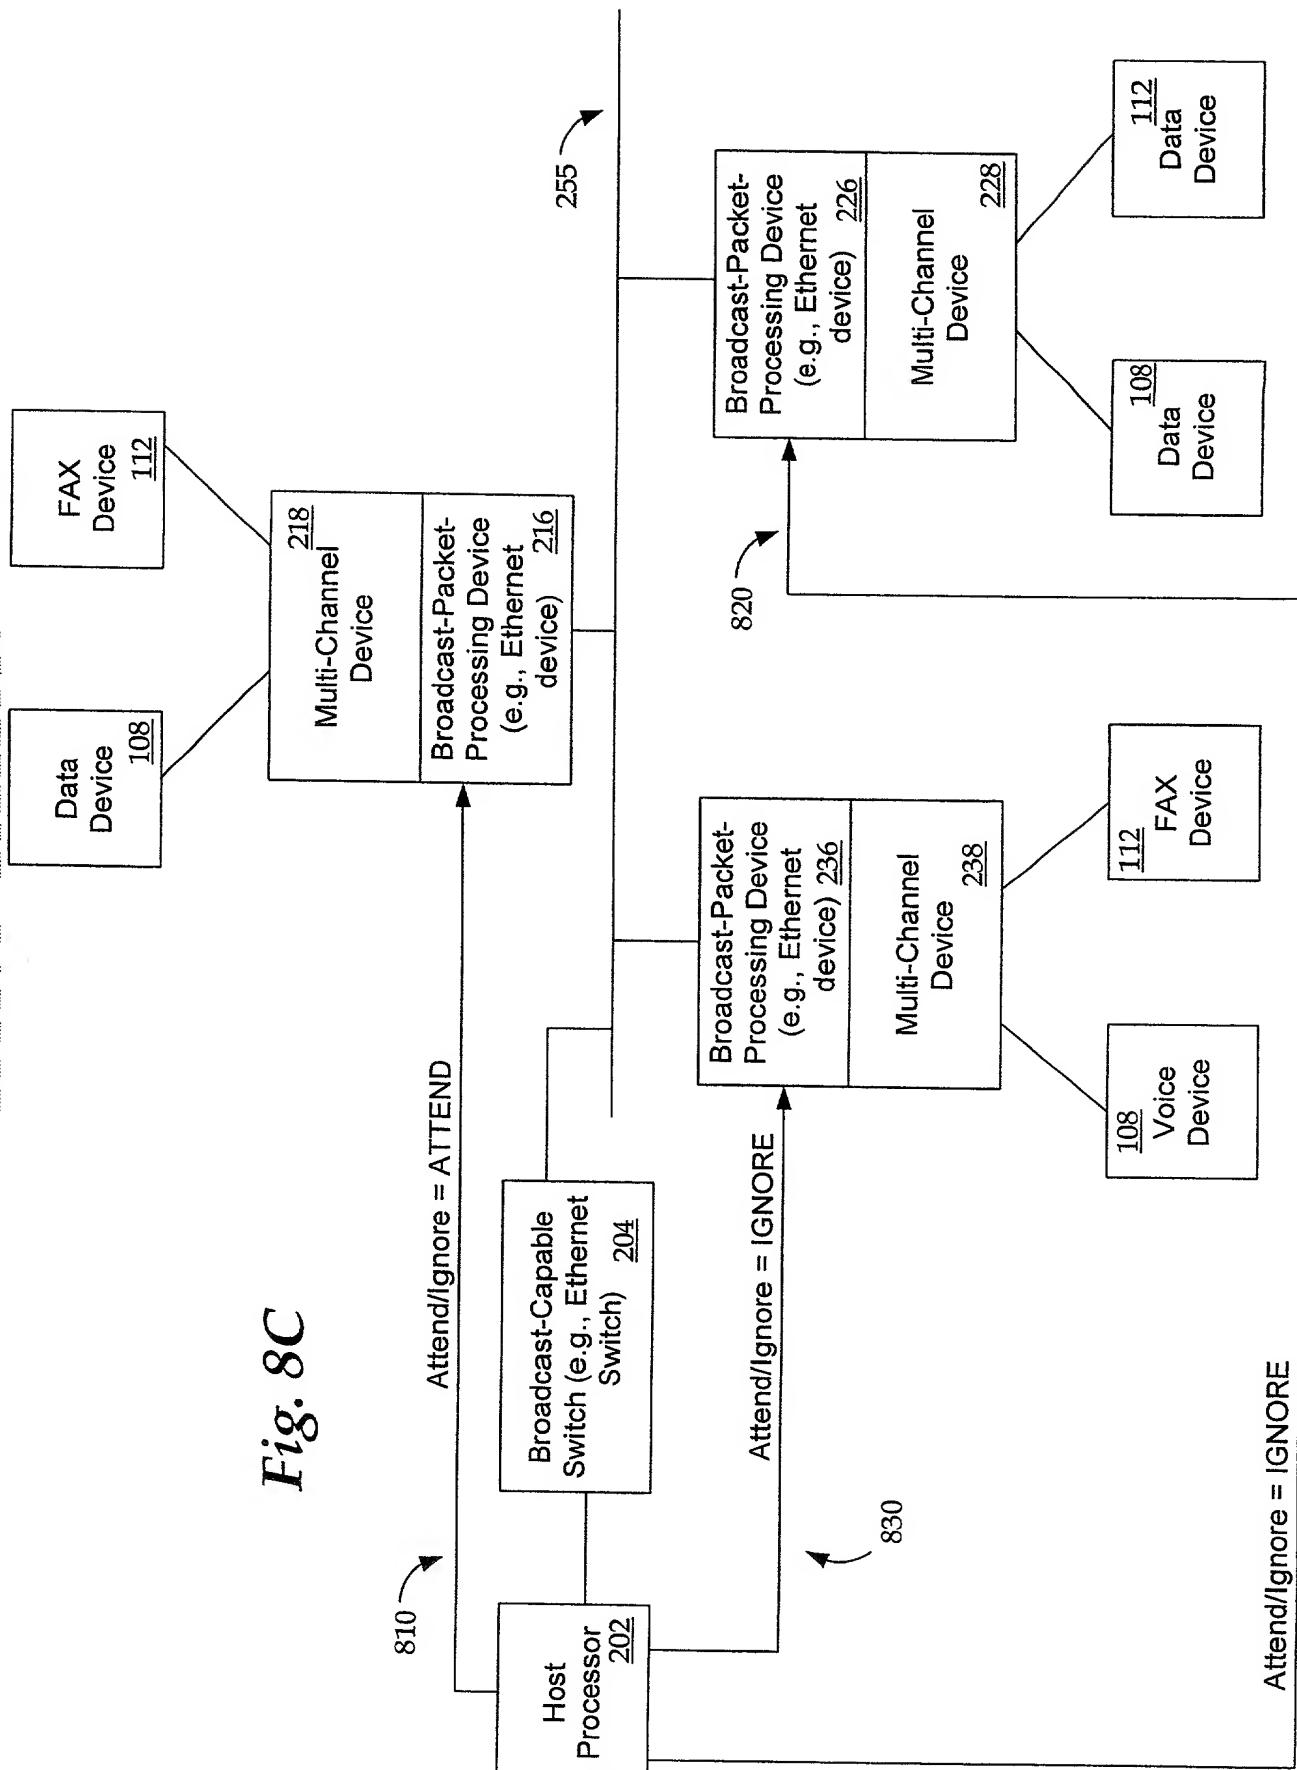



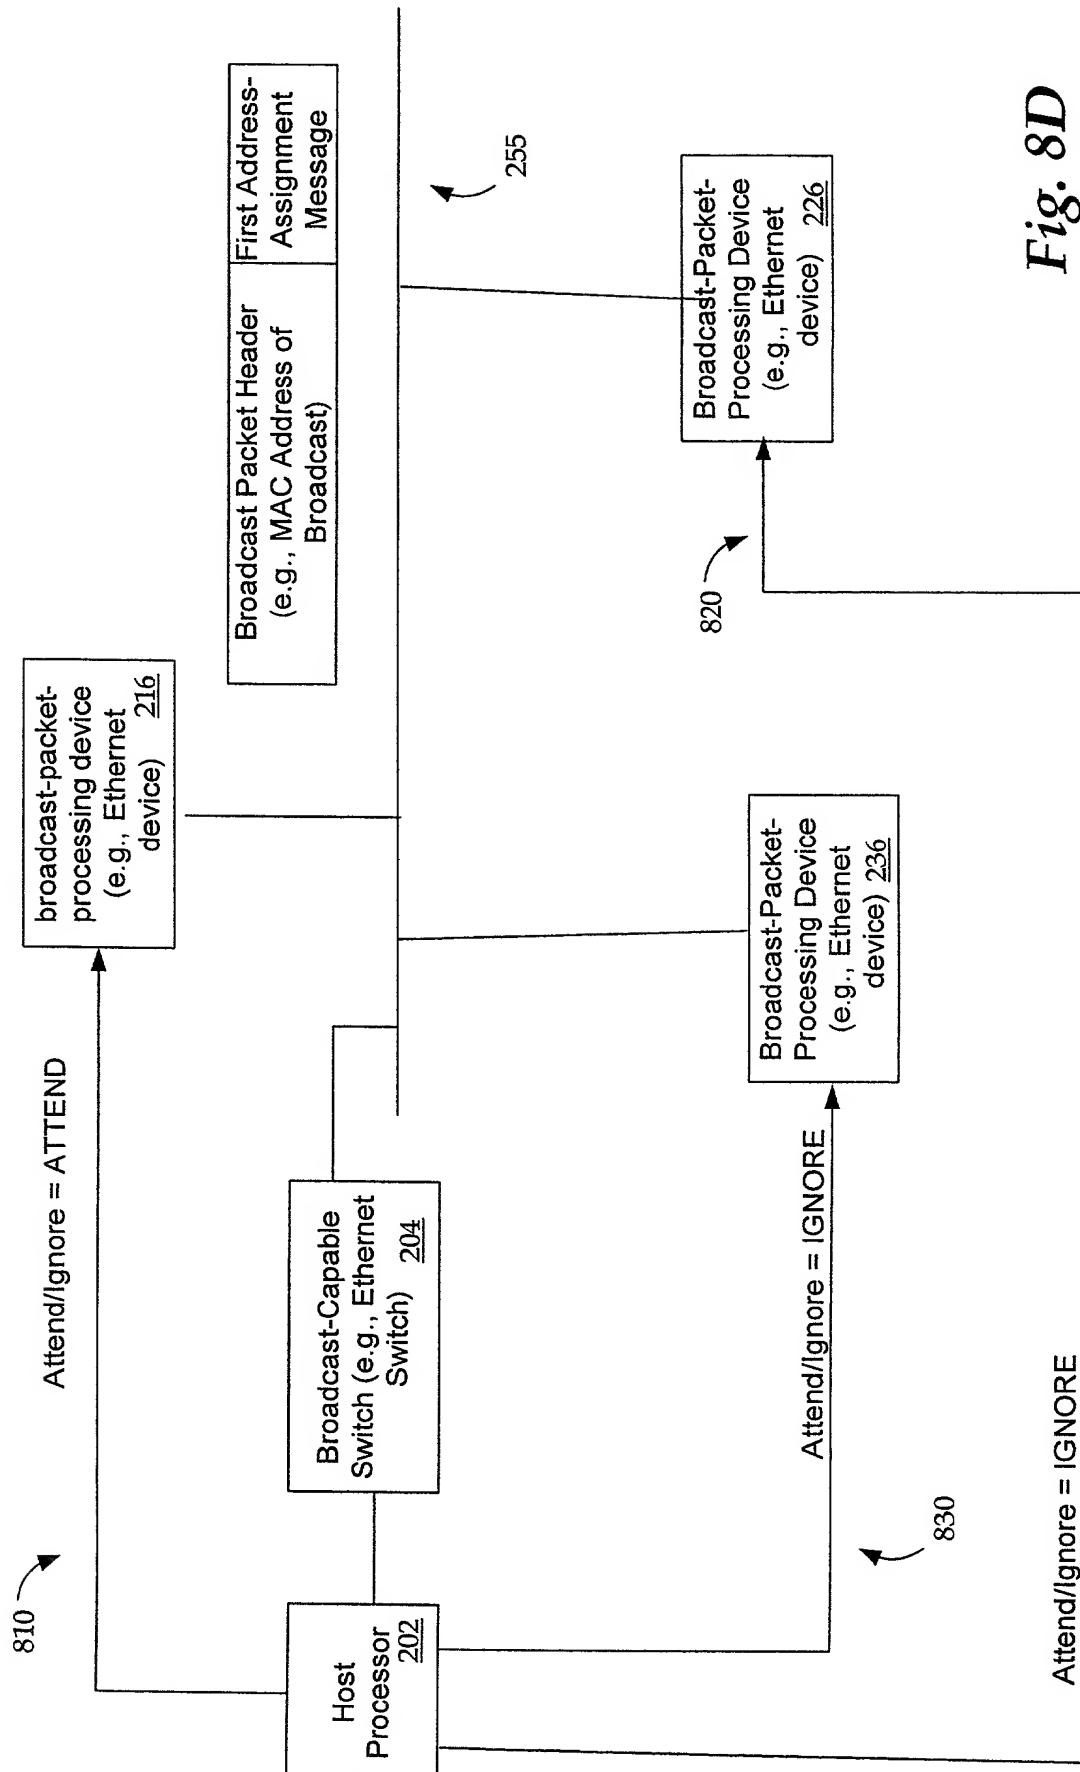


Fig. 8E

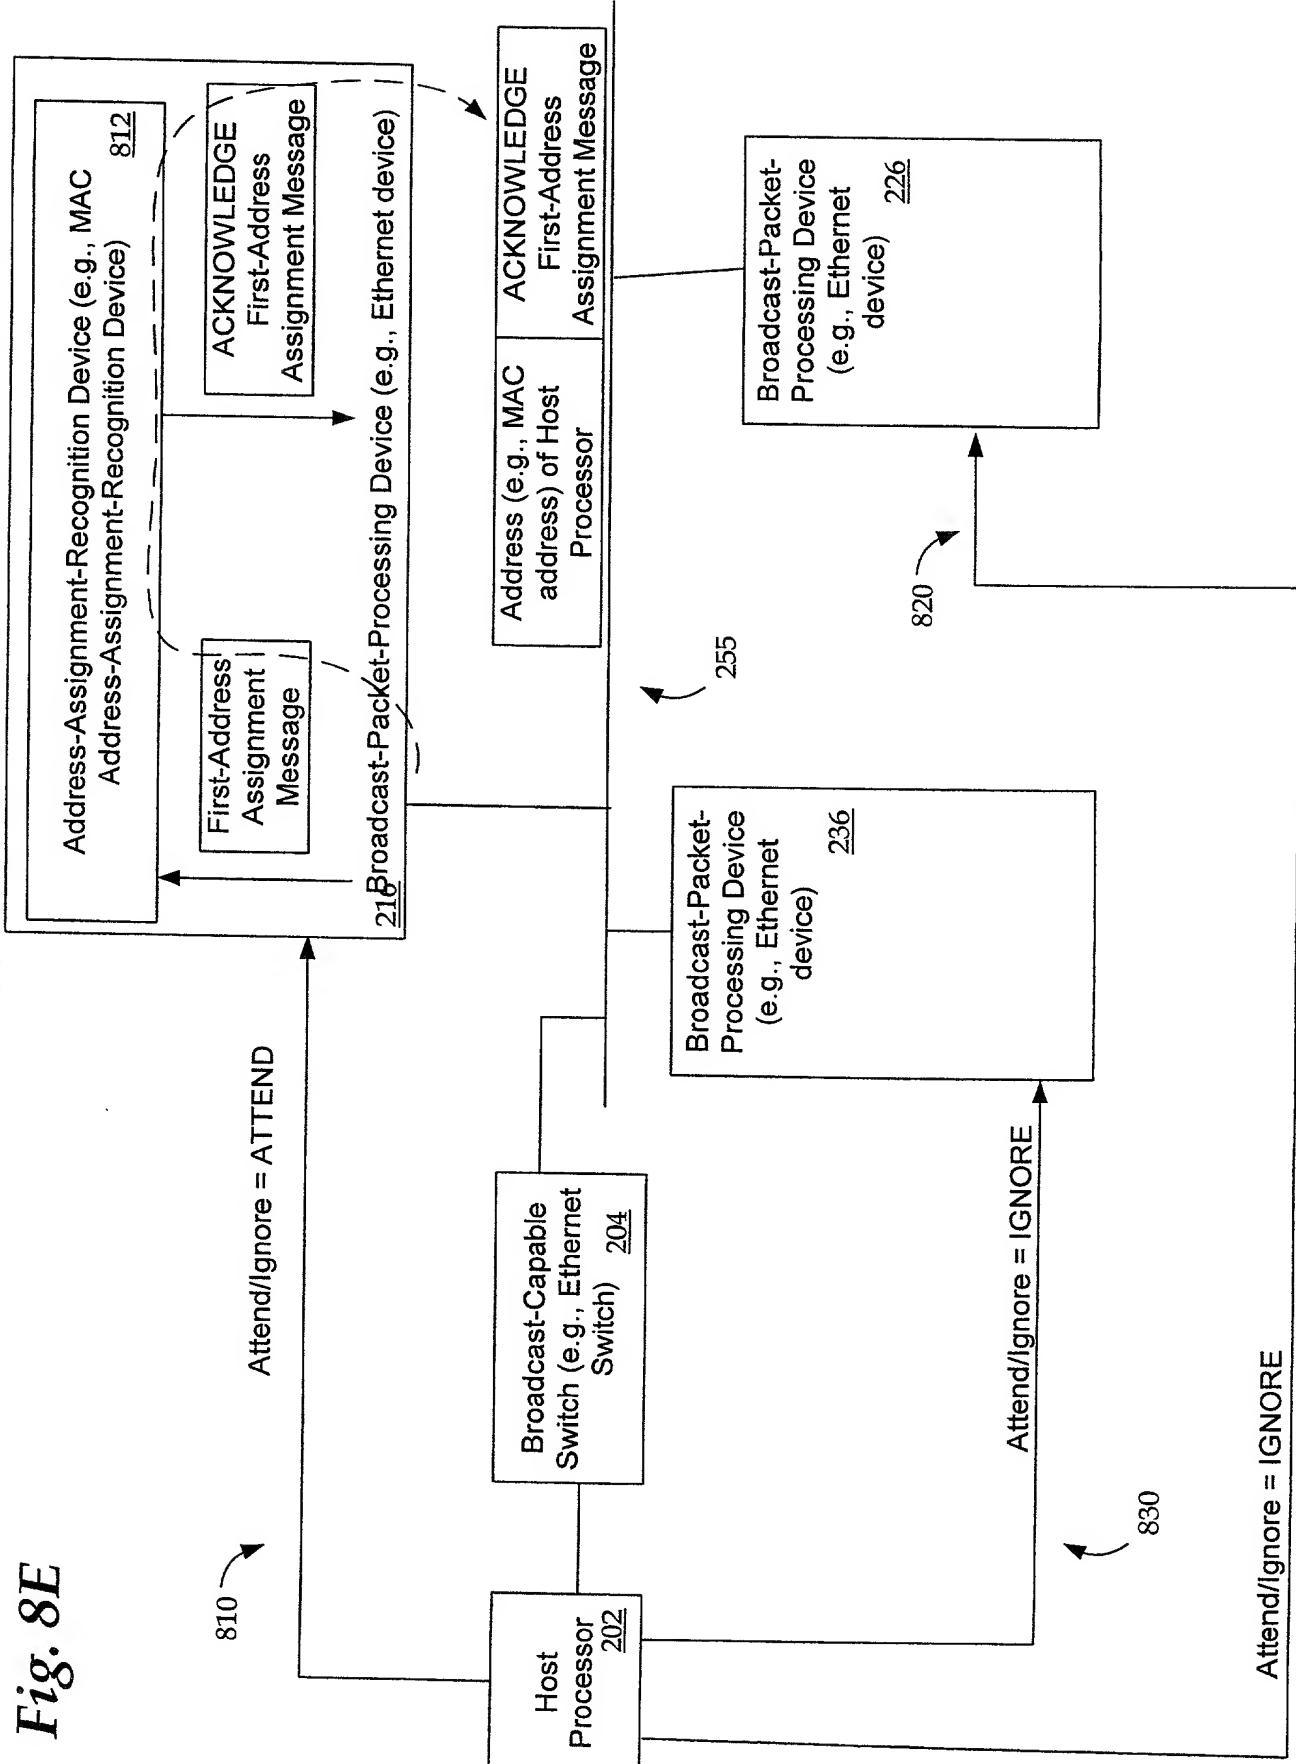

**Fig. 8F**

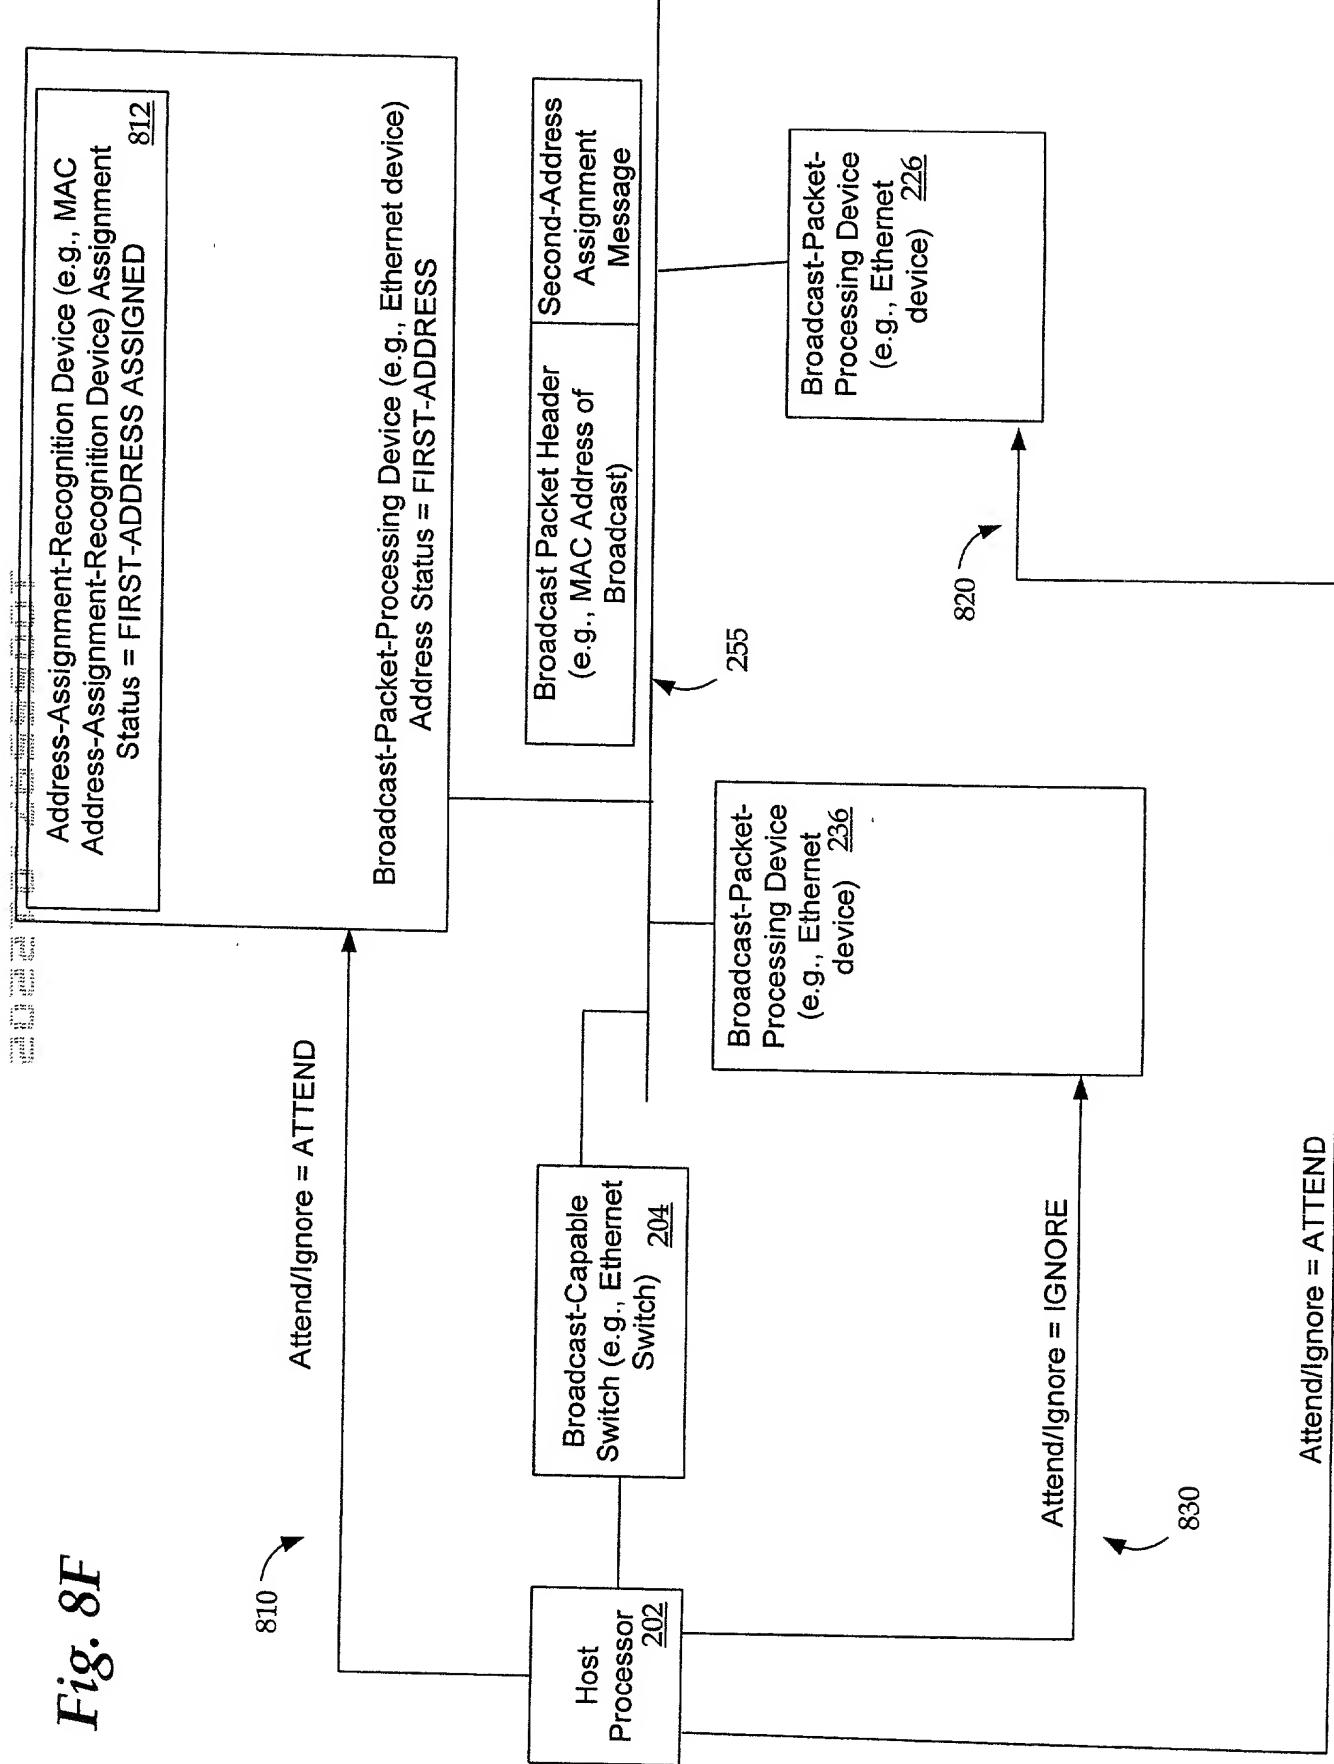

**Fig. 8G**

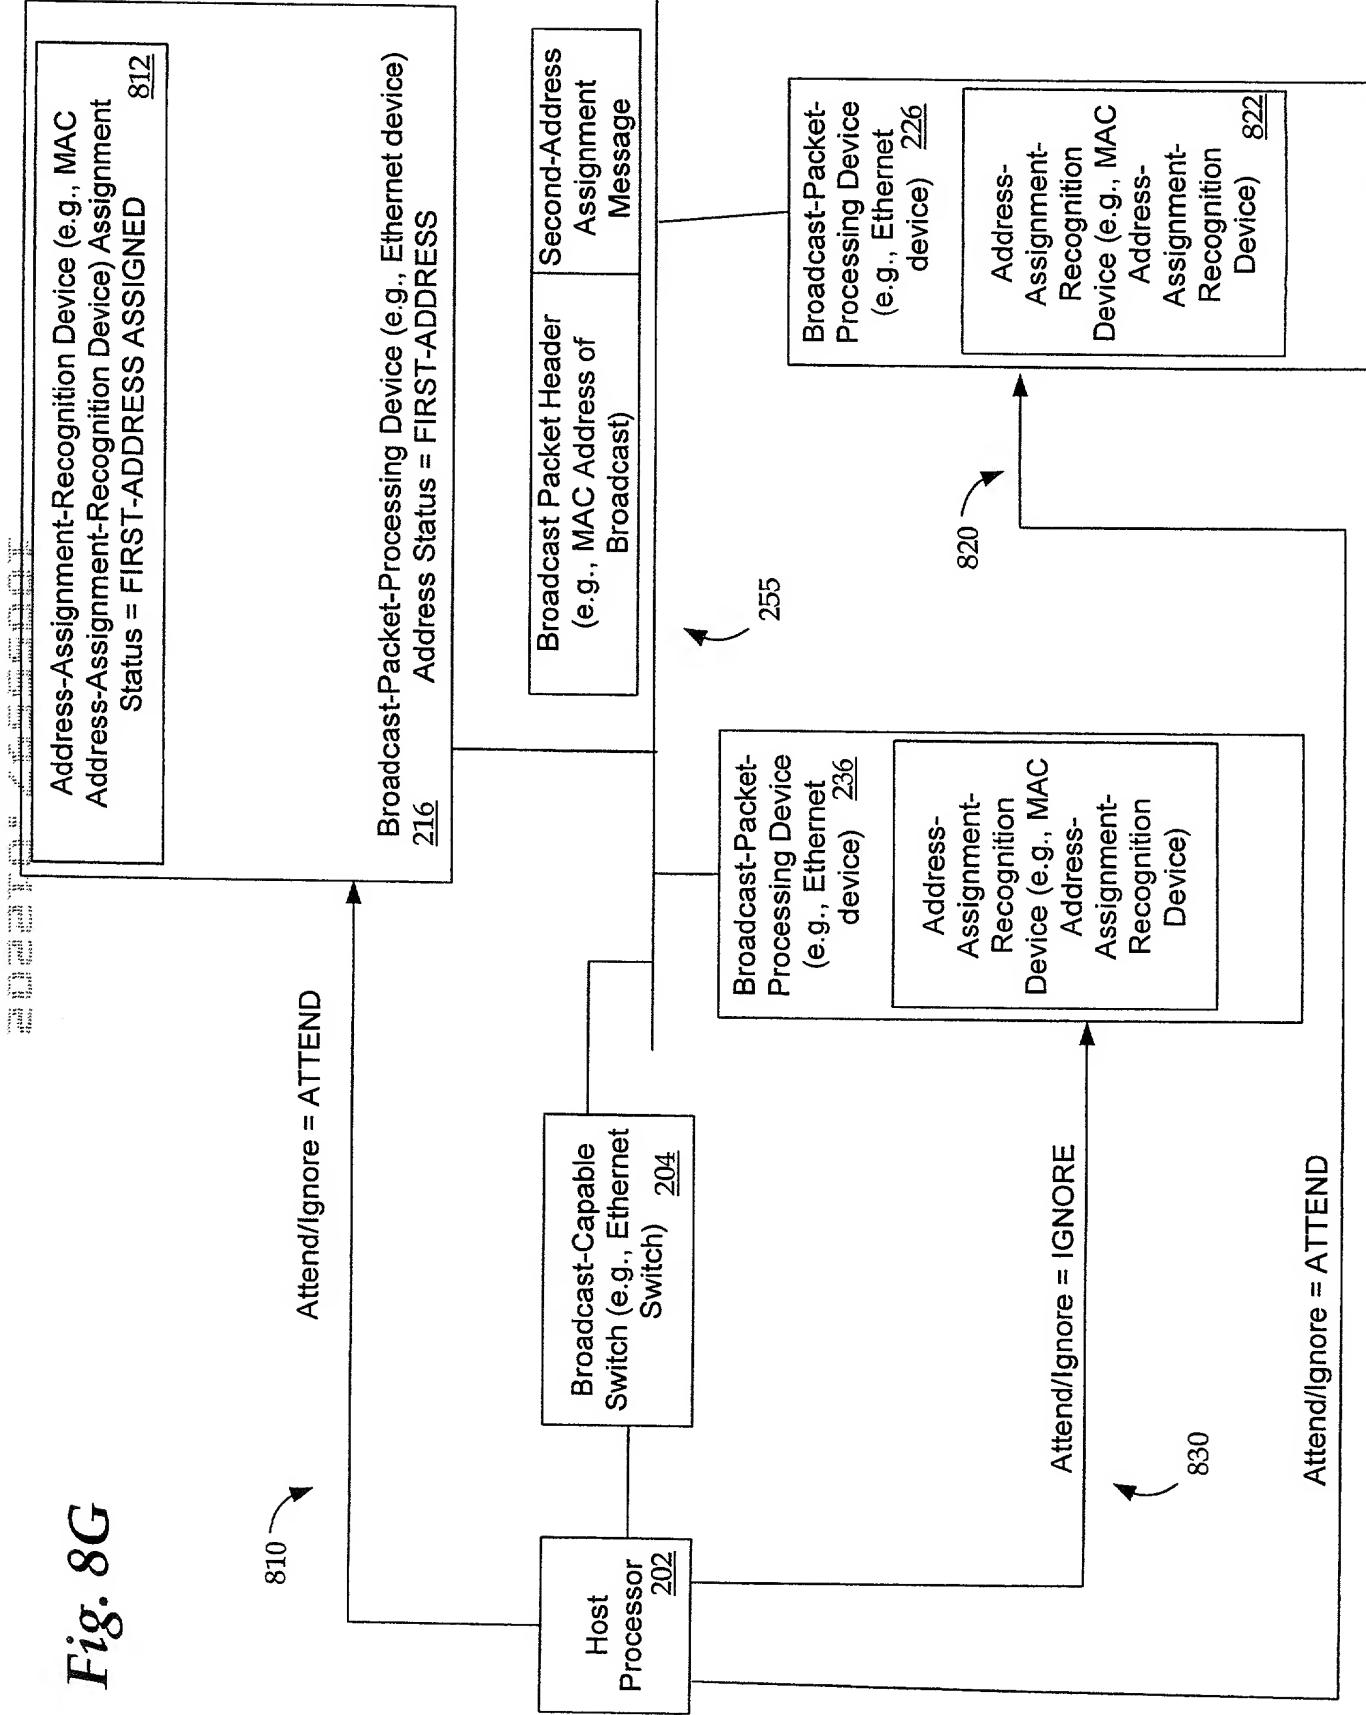


Fig. 8H



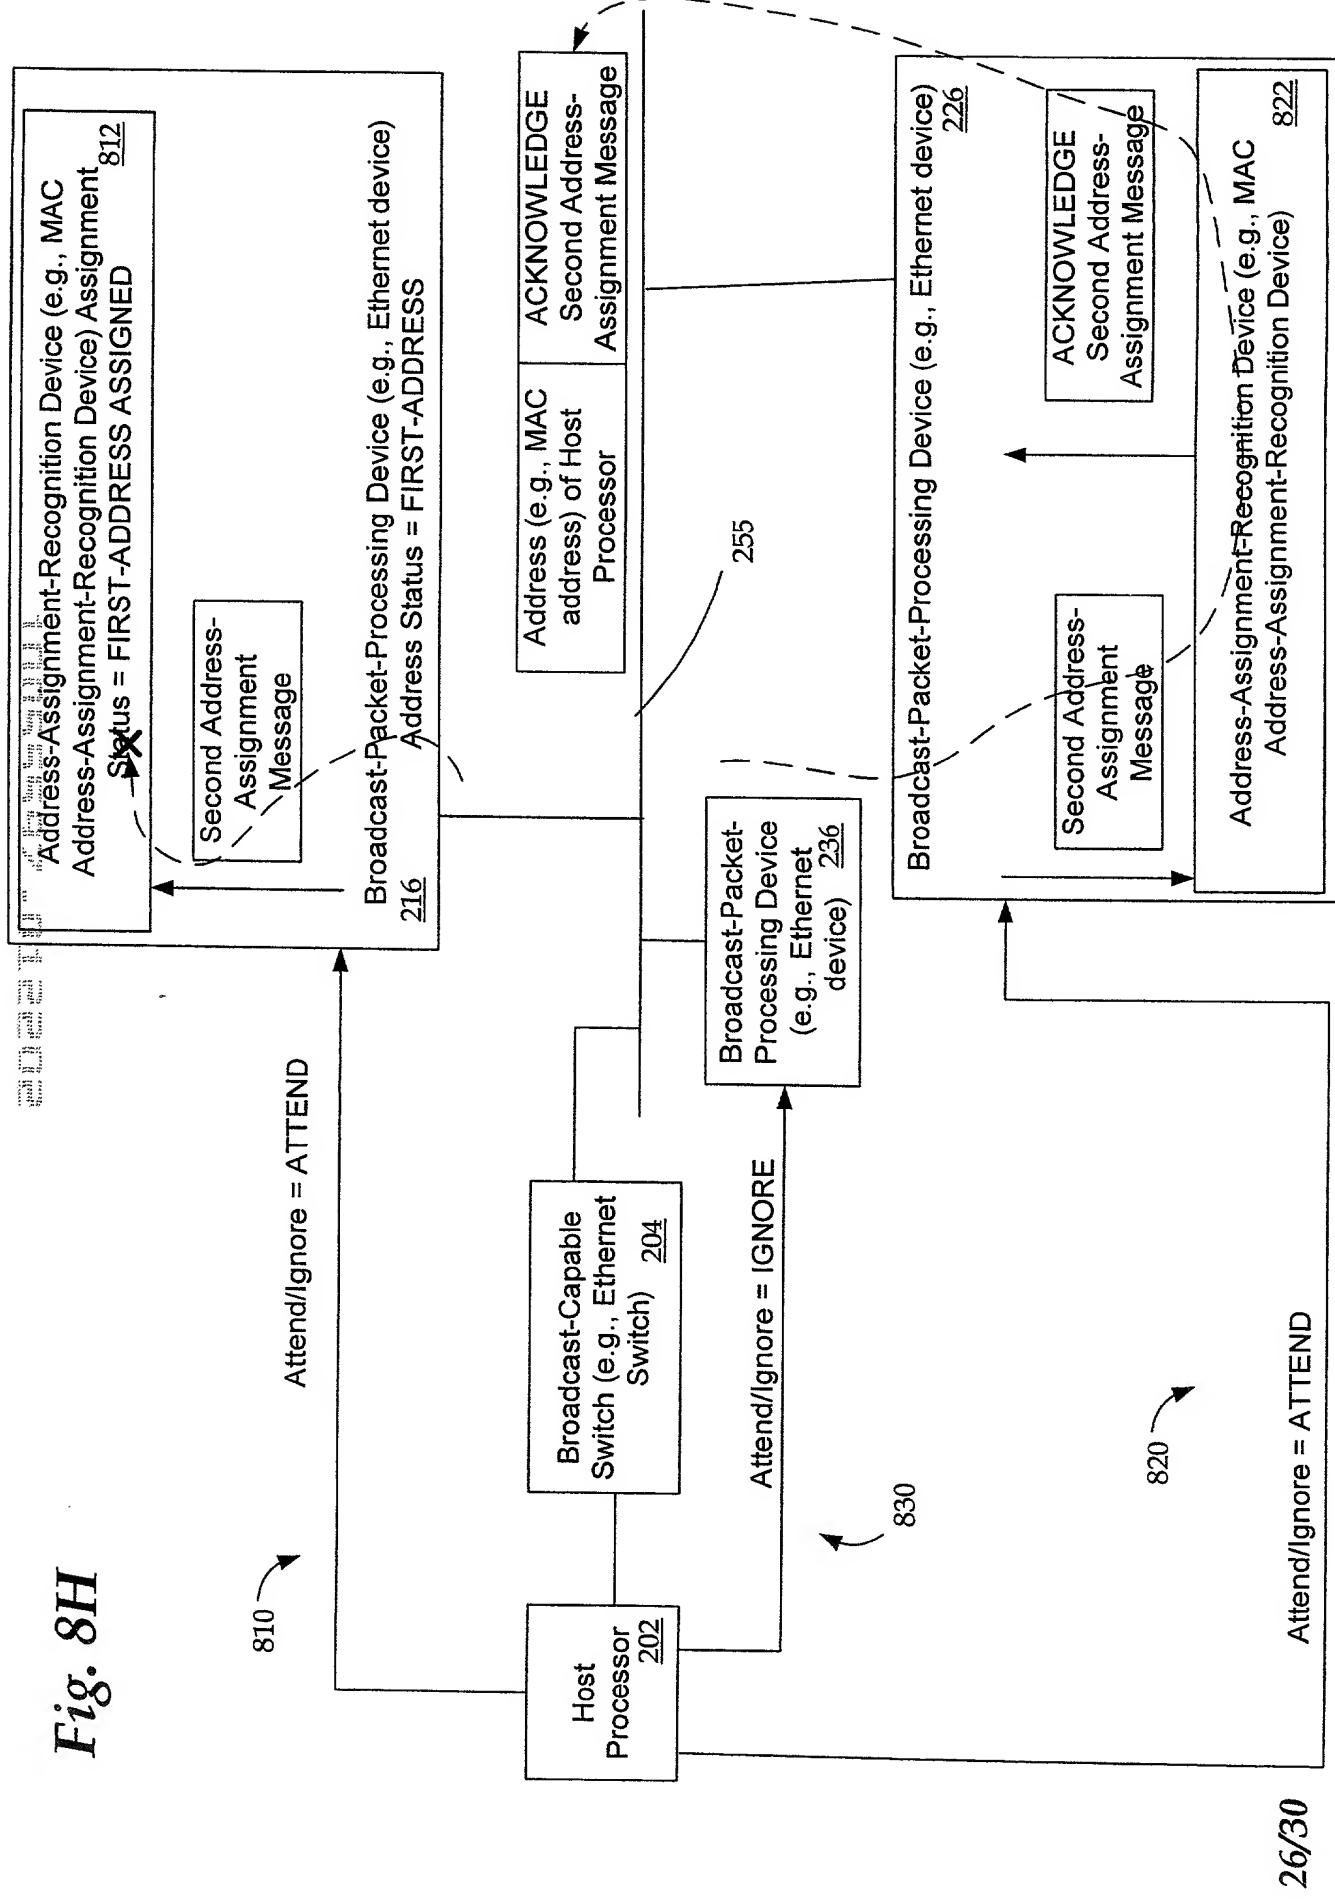


Fig. 81

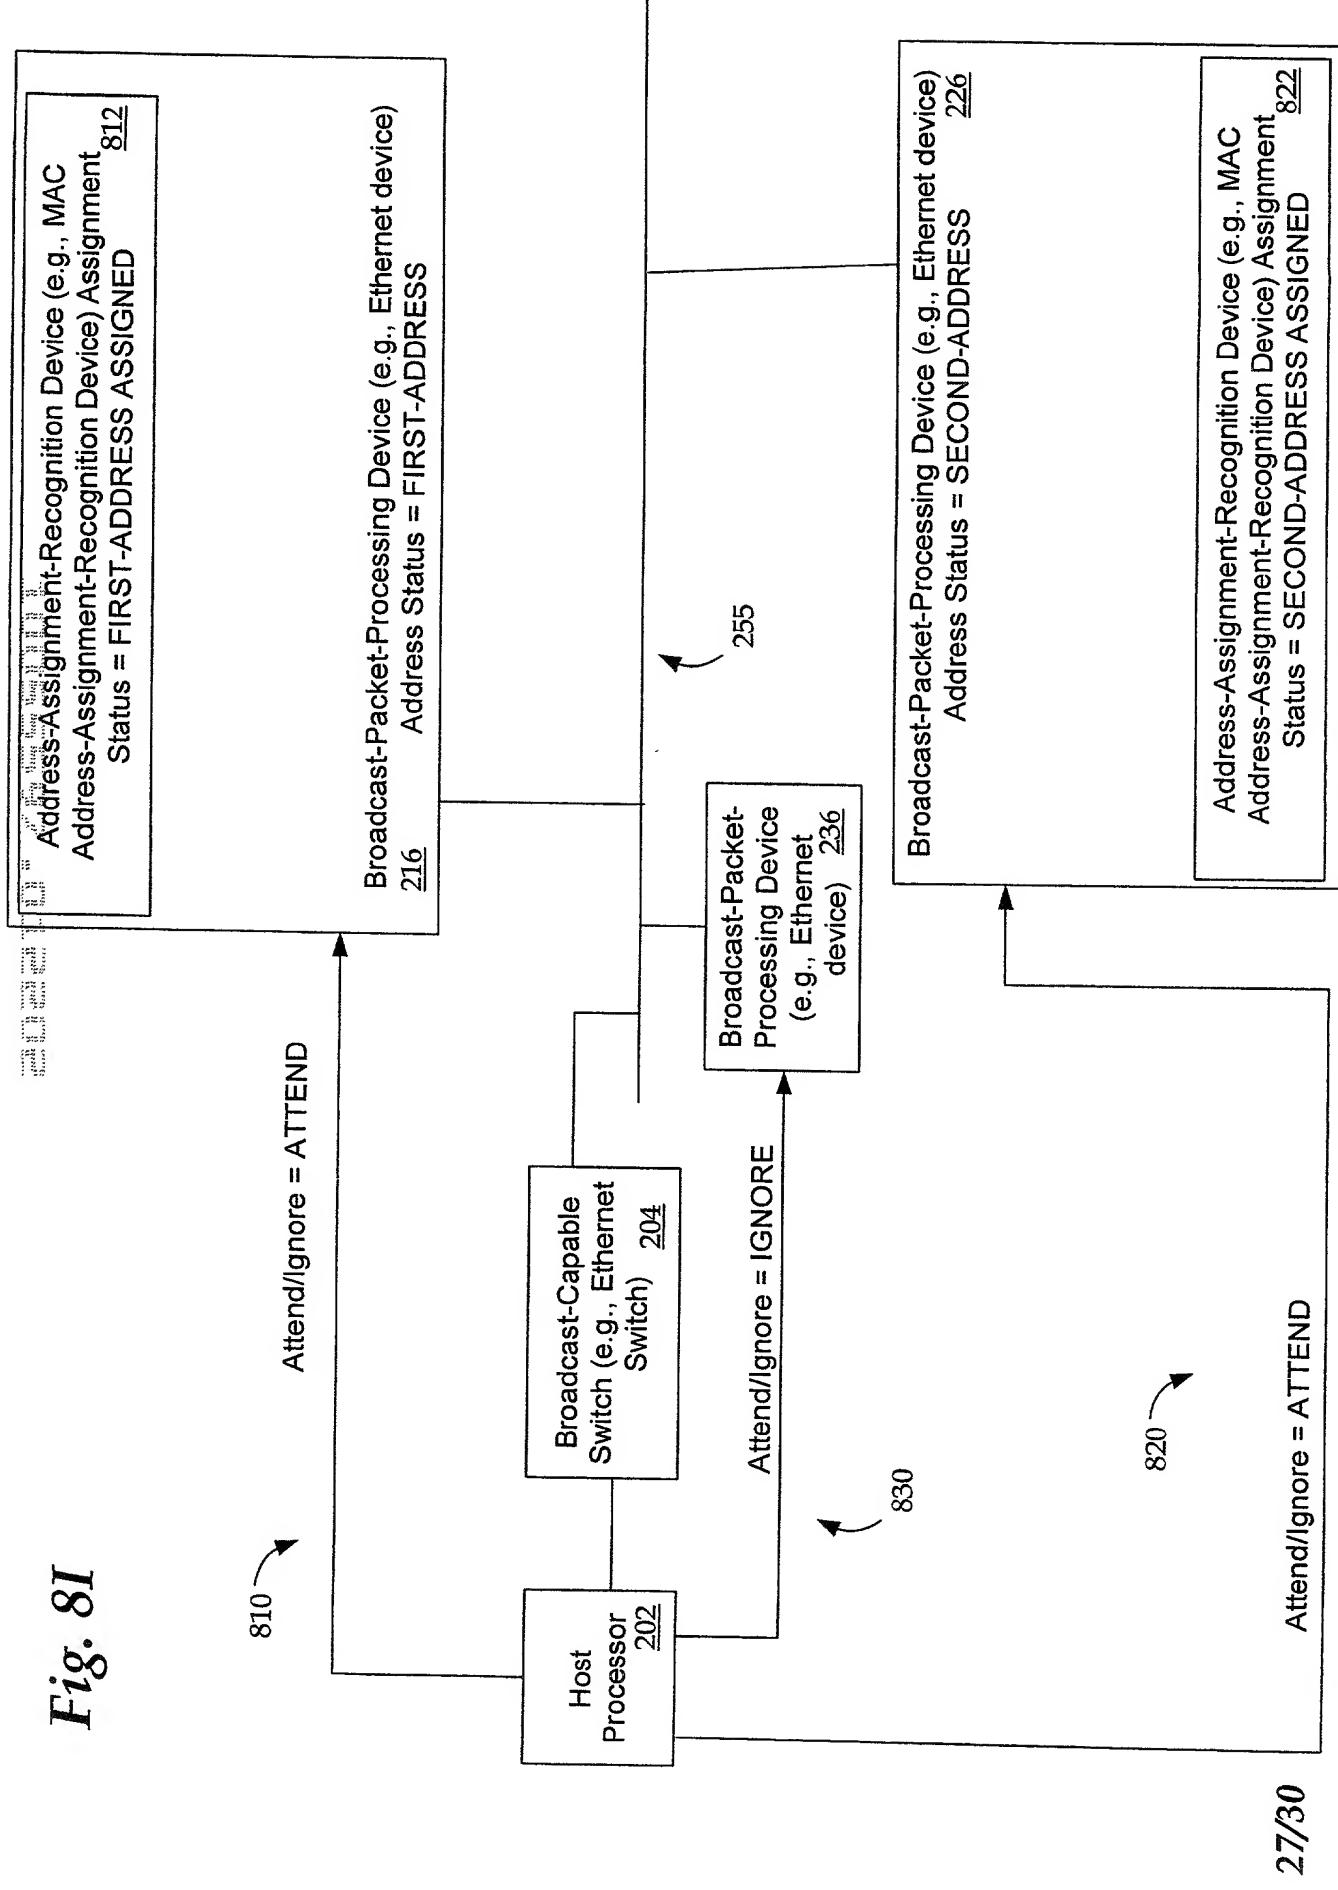

*Fig. 8J*

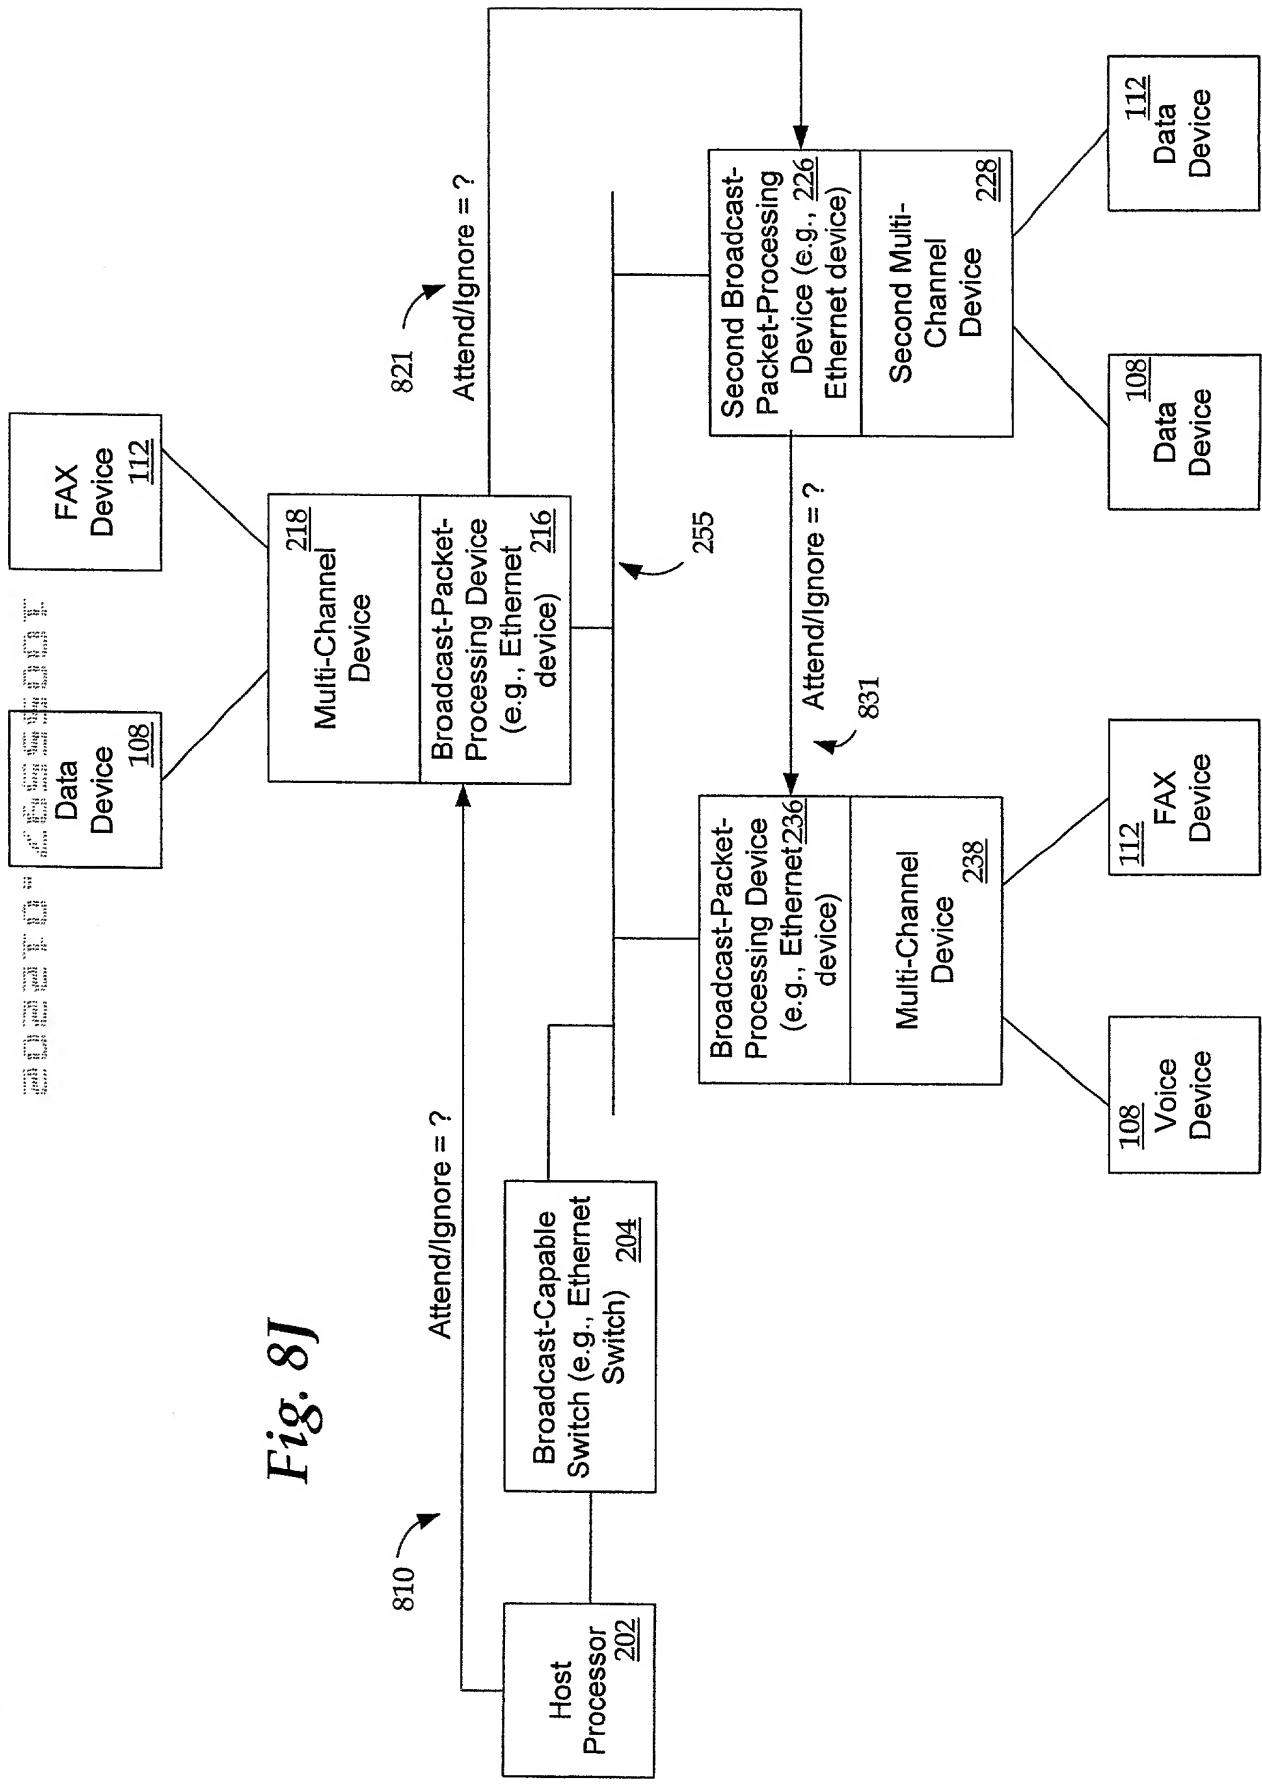

**Fig. 9A**

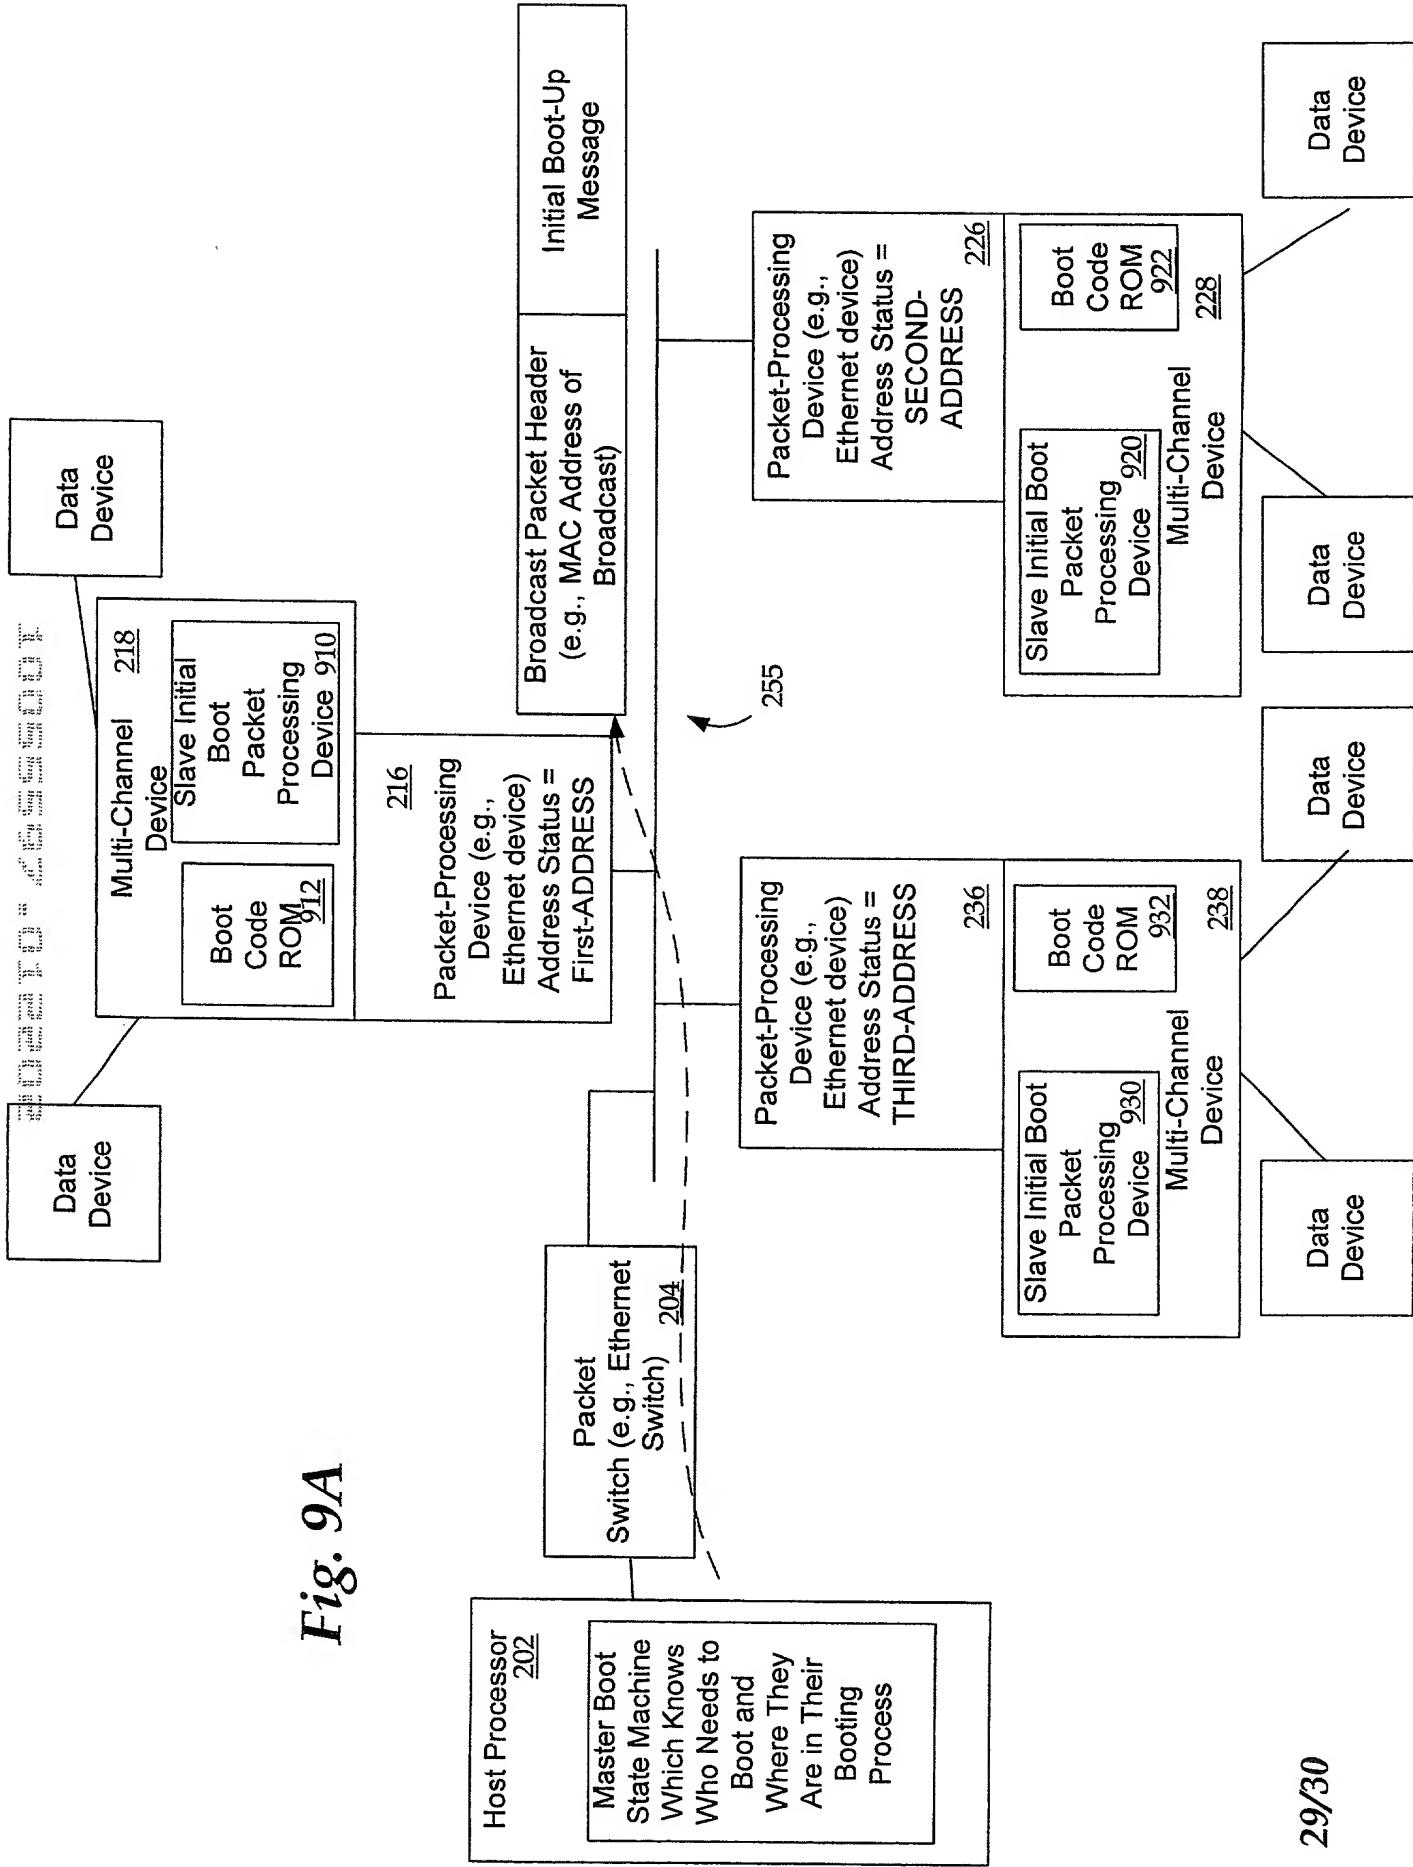


Fig. 9B

